

Key Features

Bending direction & Minimum bend diameter	Vertical, 150mm	Controls	Non Dimming DALI Dimming Switch Dimming Casambi
Finish Options	Natural Anodised (Standard) Textura Black Textura White	Power Supply	Remote Driver
System Warranty	5 Years	Power length	600mm
CRI	CRI >80 CRI >90 ¹	Wattage	10W/m
CCT	2200K 2700K 3000K 3500K 4000K 4500K 5000K 6500K Single Coloured	Protection	IP68 IK08

1. MOQ Required


Technical Information

	Monochrome / Single colours
	10W/m
Lumens/m	500
Max Run Length (m)	5m
Incremental Order Length (mm)	100mm
LED's/m	120

Lumens values based on 4000K, CRI>80


##If the length needs to be adjusted on site, contact FOS Lighting before cutting the product

Photometrics

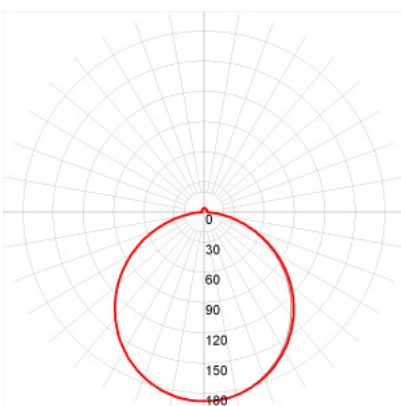


Data values reflect CRI>80, 10w/m, 4000K

Finish colour options

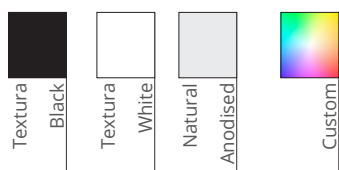

Installation Types

Surface Mounted (S)







Power Locations

Direct Entry

Side Entry Right

Side Entry Left

Bottom Entry



Accessories

* Where necessary dimensions have been rounded up to the closest whole value






Mounting Channel Standard

Mounting Channel Flexible

Mounting Channel Anti-Drop

Mounting Channel Anti-Drop Recessed

Mounting Channel Transparent Plastic



Code

Example:

VWB1010-S-10-80-22-DE-D0-10-5000

Code	Mounting	Power	CRI	CCT	Connector	Driver	Finish	Length	
VWB1010	S Surface Mounted	10 10W/m	80 90	CRI>80 CRI>90	22	2200K	D0 DA SW CA	Non-Dim DALI Switch-Dim Casambi	- XXXX
					27	2700K			
			30	3000K					
			35	3500K					
			40	4000K					
			45	4500K					
			50	5000K					
			65	6500K					
			DE	Direct Entry					
			SL	Side Entry Left					
			SR	Side Entry Right					
			BE	Bottom Entry					
			10	Black					
11	White								
79	Natural Anodised								
CU	Custom								

FOS Lighting reserve the right to change any data without notification