

FBLD


BALLAD-LED DIFFUSED BATTEN



Key Features

- L80 B10.
- Rated 70,000 hours.
- CRI>80.
- Dome diffuser.
- Batten range fabricated from 0.7mm zincseal steel with powder coated white finish.
- Suitable for fixing directly to ceiling or may be suspended with chains or rods.

Dimensions

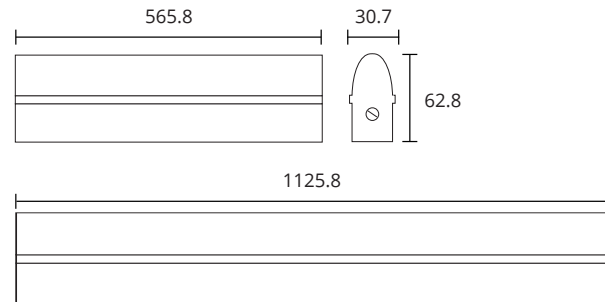

Technical Information

Configuration	Non Dim System Wattage	Combined board output (lm)	Dimensions
1x08W	10.6	1220	565.8
2x08W	22.20	2440	1125.8
1x14W	17.62	2200	565.8
2x14W	34.34	4400	1125.8

Code

FBLD/2X08/12/40/ND

Product Series	# of Boards	Wattage of Boards	Nominal Length	CCT	Driver
FBLD Ballad	1 1 Board	08 8 Watts	06 600	30 3000K	ND Non Dim
	2 2 Board	14 14 Watts	12 1200	40 4000K	DALI DALI Dim
					SD Switch Dim

See Technical Information Table for configurations options
Specifications subject to change without notice

