

TBS-LED


LED SEALED T-BAR LUMINAIRE



Key Features

- L80 B10.
- Rated 70,000 hours.
- CRI>80.
- SELV.
- Future proof replaceable gear tray.
- Recessed luminaire designed for 1200 x 600 standard 38mm high T-Bar ceilings.
- Inverted diffuser provides a smooth surface for ease of cleaning.
- Diffuser is in a sealed frame screw fixed to the luminaire body.
- A heavy duty neoprene gasket seals the diffuser frame to the T-Bar ceiling.
- High CRI available upon request.

Dimensions

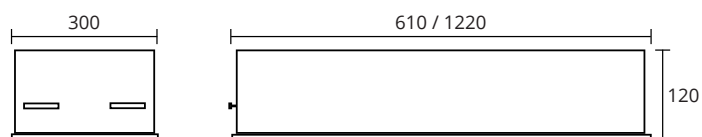

Technical Information

Configurations	Non Dim System wattage	Combined Board Output (lm)	Dimensions (mm)
1x08W	10.6	1220	610x300
2x08W	22.20	2440	610x300 & 1220x300
3x08W	28.76	3660	610x600
4x08W	38.10	4880	1220x300 & 610x600
1x14W	17.62	2200	610x300
2x14W	34.34	4400	610x300 & 1220x300
3x14W	51.92	6600	610x600
4x14W	68.52	8800	1220x300 & 610x600

Code

TBS-LED/4X08/12X3/LO/40/DALI

Product Series		# of boards		Wattage of boards		Nominal Dimensions		Diffuser		CCT		Driver	
TBS-LED	T-bar	1	1 Board	08	8W	6x3	600x300	LO	White Acrylic Microprism	30	3000K	ND	Non Dimming DALI Dimming Switch Dimming
		2	2 Board	14	14W	6x6	600x600	MP		40	4000K	DALI	
		3	3 Board			12x3	1200x300					SD	
		4	4 Board			12x6	1200x600						

Specifications subject to change without notice.

