



Key Features

Optical Systems	K19 K5 patterned diffuser	CCT	3000K 4000K
Mounting Type	Surface mount Suspension via chains, wires or rods	Colour Consistency (LED Module)	3 SDCM
Finish Options	White	COI Compliant	N/A
Warranty	5 Years	Lumen Output (Combined Board)	2440 - 8800lm
CRI	>80	Lifetime	L80 (B10) 70,000hrs

Application

Commercial, Educational, Healthcare and infrastructure indoor public spaces.

Design

Low profile surface mounted luminaire. Future proof body. The curved K19 patterned diffuser with cross-hatched patterned sides can hinge from either side of the body for easy maintenance access.

Installation

Suitable for fixing directly to ceiling or suspended with chains, wires or rods. Suitable for in-line mounting.

Notes



- Data value may change depending on configurations and product availability.

Configurations

Configurations	Non Dim System wattage	Combined Board Output (lm)	Dimensions LxWxH (mm)
2x8W	22.20	2440	625x340x90
4x8W	38.10	4880	1235x340x90
2x14W	34.34	4400	625x340x90
4x14W	68.52	8800	1235x340x90


Specifications subject to change without notice.

Spectral Distribution & Photometrics

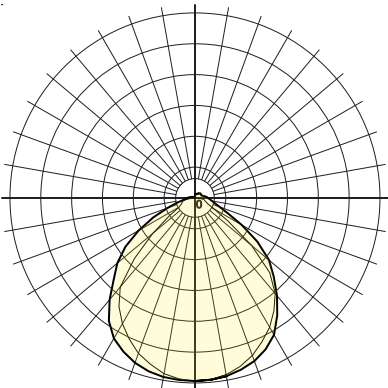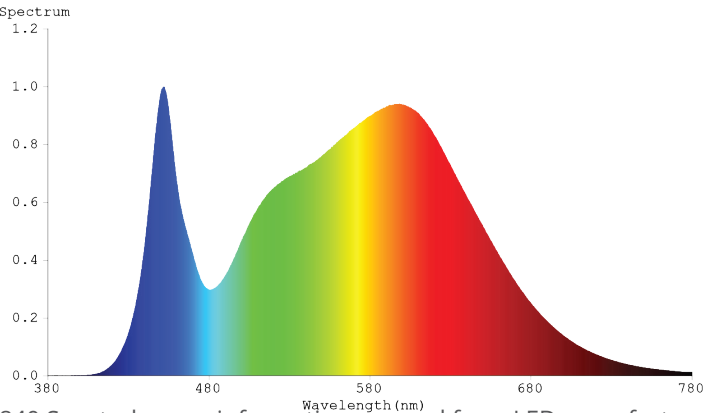

Nominal polar curve
4x14W, 1200, K19, 4000K

Dimensions

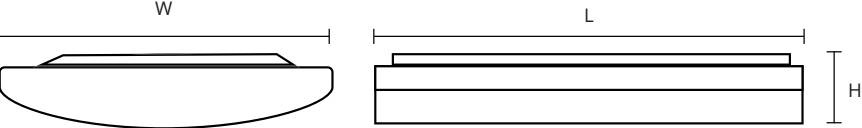

Code

RL - LED / 4X8 / 12 / K19 / 40 / SD

Product Series	# of Boards		Wattage		Nominal Dimensions		Diffuser Type		CCT		Driver	
RL-LED	2	2 Boards	8	8 Watts	06	600mm	K19	K19 Diffuser	30	3000K	ND	Non Dimming
	4	4 Boards	14	14 Watts	12	1200mm	K5	K5 Diffuser	40	4000K	DALI SD	DALI Dimming Switch Dimming