


Key Features

Optical Systems	Opal Diffused	CCT	2700K 3000K 3500K 4000K 5000K 6500K Tunable White 2500-6500K RGB RGBW
Mounting Type	Surface Mounted	Controls	Non Dimming DALI Dimming Switch Dimming Casambi
Finish Options	Natural Anodised	Power Supply	Remote
System Warranty	5 Years	Wattage	4.8W/m 9.6W/m 14.4W/m 19.2W/m 23W/m 30W/m 38.4W/m
CRI	>90 (Standard) >95 (Optional)	Ingress Protection	IP20 IP67 ¹


1. IP67 is achieved by using IP67 LED Tape.

Finish colour options




Installation Types

Surface Mounted (S)




Configurations

Standard Length

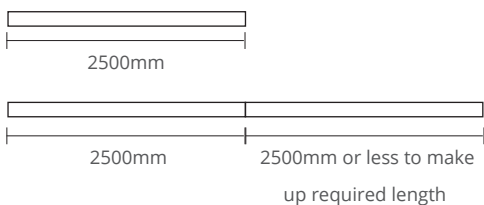

Angle




Technical Information

	4.8W/m (5)	9.6W/m (10)	14.4W/m (15)	19.2W/m (20)	
Monochrome	CCT				
	2700K / 3000K / 3500K / 4000K / 5000K / 6500K				
	Ingress Protection (IP)				
	IP20/IP67				
CRI>					
90 / 95					
Lumens/m (4000K)		425	850	1275	1700
RGB & SINGLE COLOURS	14.4W/m (14)				
	CCT				
	RGB / Red / Green / Blue / Yellow				
	Ingress Protection (IP)				
IP20/IP67					
CRI>					
-					
Lumens/m		350-410 (RGB)			
RGBW	19.2W/m (19) *		23W/m (23)	30W/m (30)	19.2W/m (20)
	CCT				
	RGBW (3000K/4000K/6000K)				
	Ingress Protection (IP)				
IP20/IP67					
Lumens/m					
-					
Tunable White	19.2W/m (19)		38.4W/m (38)	23W/m (23)	
	CCT				
	2500K-6000K				
	Ingress Protection (IP)				
IP20/IP67		IP20	IP20/IP67		
CRI>					
90		90	90		
Lumens/m		1680	3360	1680	


* LED option has an on-board constant controller IC with inbuilt temperature control.

Photometrics

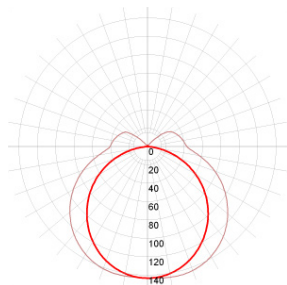

Accessories

Mounting Channel



Code

Example: V2019 - S0590270DD079 - 2500

Code		Mounting		Power		CRI		CCT		Optics		Driver		Finish		Length	
V2019	V2019, IP20	S	Surface Mounted	05	4.8W/m	90	CRI>90	27	2700K	OD	Opal	D0	Non-Dim	79	Natural Anodised	- XXXX	
V2019IP	V2019, IP65			10	9.6W/m			30	3000K								
				14	14.4W/m			35	3500K		D4						DALI RGBW
				15	14.4W/m			40	4000K		SW						Switch-Dim
				19	19.2W/m			50	5000K		CA						Casambi
				20	19.2W/m			65	6500K		C4						Casambi (TW/ RGB/RGBW)
				23	23W/m			TW	2500K-6000K		T2						Tunable White (DALI/)
				30	30W/m			RGB	RGB								
				38	38.4W/m			RGBW3K	RGBW 3000K								
								RGBW4K	RGBW 4000K								
				RGBW6K	RGBW 6000K												

FOS Lighting reserve the right to change any data without notification