

iSTART 68

LED Downlight Adjustable



Quick info

GENERAL

Recessed
Adjustable
Trimmed / Trimless
Round
Square

LED

COB LED module
3000K, 4000K
CRI>90
Binning < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

Direct Illumination
Beam angle 12°, 20°, 40°, 55°

PHYSICAL

Aluminium
Powder coating


Function

iSTART 68 is a versatile series comprising of adjustable and fixed fittings available in trimmed or trimless.

iSTART streamlines the process with a single light engine, with an adjustable head that offers flexible positioning, with 355° rotation and 90° pivot capabilities.

A smart mechanical design ensures precise alignment.

Features

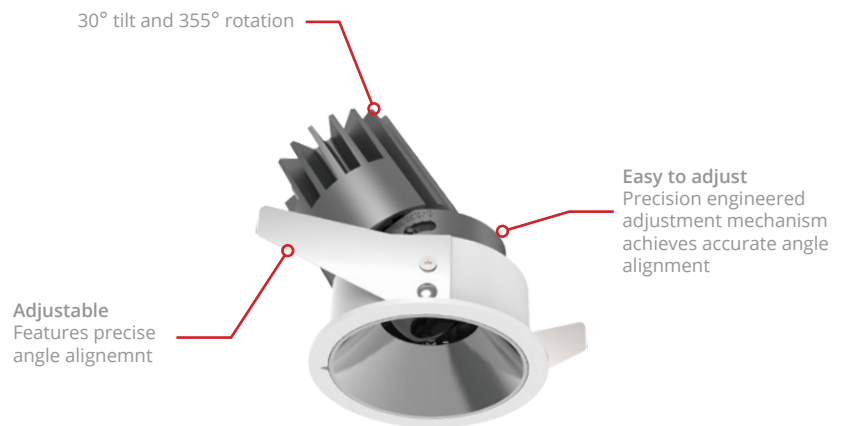

Dimensions

SRA68	TRA68	SSA68	TSA68
Ø68mm cutout	Ø70mm cutout	68mm x 68mm cutout	70mm x 70mm cutout
98mm	98mm	98mm	98mm
Ø78mm	Ø110mm	78mm x 78mm	100mm x 100mm

iSTART 68

LED Downlight Adjustable

Ordering info

SYSTEM POWER

9W
10W
13W

COLOUR TEMPERATURE

3000K
4000K

COLOUR RENDERING INDEX

CRI>90

ELECTRICAL

Non-Dim
Phase-Dim
1-10V Dim
DALI

HOUSING

White
Black

LENS



12° Beam



20° Beam



40° Beam



55° Beam

Technical Information

Fitting	Module Output	LED Wattage	System Wattage	CRI	Beam
SRA68-7.5W-930	600lm	7.5W	9W	90	20°/ 40°
SRA68-7.5W-940	650lm	7.5W	9W	90	20°/ 40°
SRA68-7.5W-930	500lm	7.5W	9W	90	55°
SRA68-7.5W-940	550lm	7.5W	9W	90	55°
SRA68-11W-930	800lm	11W	13W	90	20°/ 40°
SRA68-11W-940	850lm	11W	13W	90	20°/ 40°
SRA68-11W-930	650lm	11W	13W	90	55°
SRA68-11W-940	700lm	11W	13W	90	55°
SRA68-8.5W-930	480lm	8.5W	10W	90	12°
SRA68-8.5W-940	500lm	8.5W	10W	90	12°
TRA68-7.5W-930	600lm	7.5W	9W	90	20°/ 40°
TRA68-7.5W-940	650lm	7.5W	9W	90	20°/ 40°
TRA68-7.5W-930	500lm	7.5W	9W	90	55°
TRA68-7.5W-940	550lm	7.5W	9W	90	55°
TRA68-11W-930	800lm	11W	13W	90	20°/ 40°
TRA68-11W-940	850lm	11W	13W	90	20°/ 40°
TRA68-11W-930	650lm	8.5W	13W	90	55°
TRA68-11W-940	700lm	8.5W	13W	90	55°
TRA68-8.5W-930	480lm	8.5W	10W	90	12°
TRA68-8.5W-940	500lm	8.5W	10W	90	12°

Ordering Information

XXX68 - XXW - XX - XX - XX - ND - XX

Fitting	Wattage	CRI	CCT	Lens	Controls	Finish
(SRA) Round Downlight (SSA) Square Downlight (TRA) Trimless Recessed Round Downlight (TSA) Trimless Recessed Square Downlight	(7.5) 7.5W (8.5) 8.5W (11) 11W	(30) 3000K (40) 4000K	(90) CRI>90	(12) 12° (20) 20° (40) 40° (55) 55°	(ND) Non-Dim (PH) Phase-Dim (1-10) 1-10V Dim (DA) DALI	(10) Black (11) White

PLEASE REPLACE XX WITH THE FIGURE INSIDE THE BRACKETS LOCATED IN THE TABLE.

iSTART 68

LED Downlight Adjustable

Ordering info

SYSTEM POWER

9W
10W
13W

COLOUR TEMPERATURE

3000K
4000K

COLOUR RENDERING INDEX

CRI>90

ELECTRICAL

Non-Dim
Phase-Dim
1-10V Dim
DALI

HOUSING

White
Black

REFLECTOR



12° Beam



20° Beam



40° Beam



55° Beam

Technical Information

Fitting	Module Output	LED Wattage	System Wattage	CRI	Beam
SSA68-7.5W-930	600lm	7.5W	9W	90	20°/ 40°
SSA68-7.5W-940	650lm	7.5W	9W	90	20°/ 40°
SSA68-7.5W-930	500lm	7.5W	9W	90	55°
SSA68-7.5W-940	550lm	7.5W	9W	90	55°
SSA68-11W-930	800lm	11W	13W	90	20°/ 40°
SSA68-11W-940	850lm	11W	13W	90	20°/ 40°
SSA68-11W-930	650lm	11W	13W	90	55°
SSA68-11W-940	700lm	11W	13W	90	55°
SSA68-8.5W-930	480lm	8.5W	10W	90	12°
SSA68-8.5W-940	500lm	8.5W	10W	90	12°
TSA68-7.5W-930	600lm	7.5W	9W	90	20°/ 40°
TSA68-7.5W-940	650lm	7.5W	9W	90	20°/ 40°
TSA68-7.5W-930	500lm	7.5W	9W	90	55°
TSA68-7.5W-940	550lm	7.5W	9W	90	55°
TSA68-11W-930	800lm	11W	13W	90	20°/ 40°
TSA68-11W-940	850lm	11W	13W	90	20°/ 40°
TSA68-11W-930	650lm	8.5W	13W	90	55°
TSA68-11W-940	700lm	8.5W	13W	90	55°
TSA68-8.5W-930	480lm	8.5W	10W	90	12°
TSA68-8.5W-940	500lm	8.5W	10W	90	12°

Ordering Information

XXX68 - XXW - XX - XX - XX - ND - XX

Fitting	Wattage	CRI	CCT	Lens	Controls	Finish
(SRA) Round Downlight (SSA) Square Downlight (TRA) Trimless Recessed Round Downlight (TSA) Trimless Recessed Square Downlight	(7.5) 7.5W (8.5) 8.5W (11) 11W	(30) 3000K (40) 4000K	(90) CRI>90	(12) 12° (20) 20° (40) 40° (55) 55°	(ND) Non-Dim (PH) Phase-Dim (1-10) 1-10V Dim (DA) DALI	(10) Black (11) White

PLEASE REPLACE XX WITH THE FIGURE INSIDE THE BRACKETS LOCATED IN THE TABLE.