


# VEKTA V4080

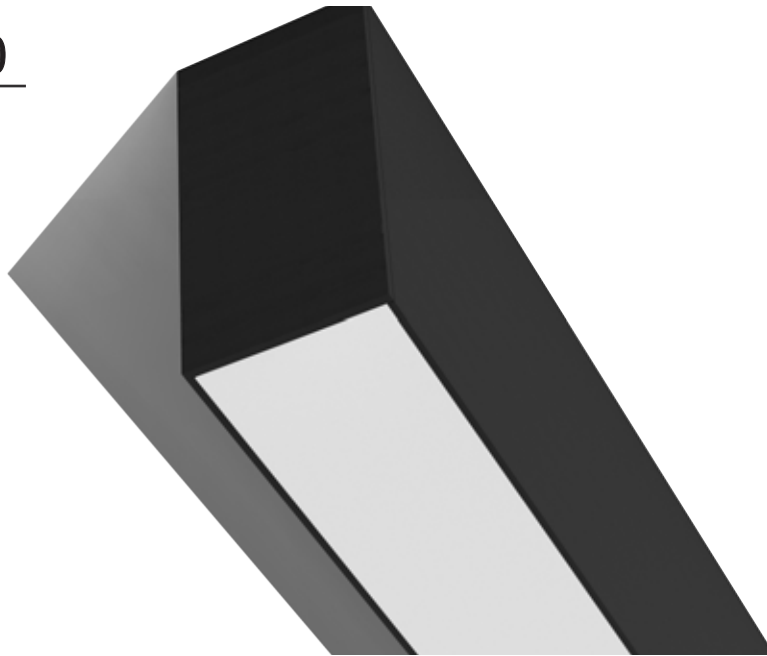

## Key Features


- Complies with relevant Australian Standards
- Even light distribution
- Screwless end caps
- Emergency Options available (On Request)
- Provided shop drawings
- Welded joints (On Request)
- Plug and play
- Australian manufactured

## Compliance



\*Cyanosis compliant on request

## Colour Options



## Code


Example:

V4080-S1290300DDO10-2400

Product Code	Mounting	Power #	CRI	CCT	Optics	Driver	Finish	Length
V4080	S - Surface Mount T - Trimless Recessed W - Wall C - Wall Up and Down P/D - Pendant U/Y - Pendant Up and Down	12 - 12 W/m (912 lm/m) 16 - 16 W/m (1216 lm/m) 20 - 20 W/m (1520 lm/m) 24 - 24 W/m (1824 lm/m) 28 - 28 W/m (2128 lm/m) 32 - 32 W/m (2432 lm/m) 36 - 36 W/m (2736 lm/m) 40 - 40 W/m (3040 lm/m) 44 - 44 W/m (3344 lm/m) 48 - 48 W/m (3648 lm/m)	80 - CRI>80 90 - CRI>90	30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K TW - 2700-6500K	OD - Opal MP - Micro Prismatic Lens	DO - Non-Dim DA - Dali-Dim SW - Switch-Dim CA - Casambi T2 - Tunable White	10 - Black 11 - White 75 - Grey 79 - Anodised CU - Custom	- xxxx mm

# Luminous flux figures based on Opal, 4000K, CRI>90 version

## Mounting

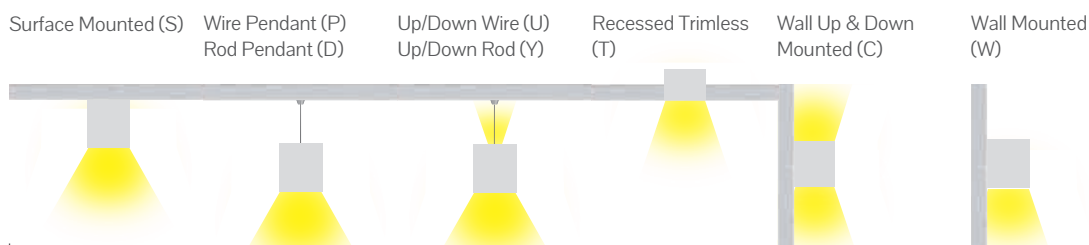

## Dimensions

