

PBS-LED


IP65 LED PLASTER SEALED TROFFER



Key Features

- L80 B10.
- Rated 70,000 hours.
- CRI>80.
- SELV.
- Future proof replaceable gear tray.
- Heavy duty neoprene gasket ensures positive seal.
- Inverted diffuser in screw fixed frame.
- Diffuser frame is connected to the body by safety lanyards.
- High CRI available upon request.
- Clinical observation available upon request.

Dimensions

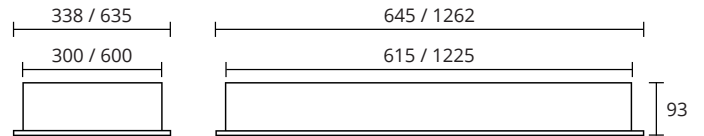

Plaster Cutout Dimension	Fitting Dimension
615 x 300	635 x 338
1225 x 300	1262 x 338
615 x 600	635 x 635
1225 x 600	1262 x 635

Technical Information

Configurations	Non Dim System wattage	Combined Board Output (lm)	Dimensions (mm)
1x08W	10.6	1220	645x338
2x08W	22.20	2440	645x338 & 1262x338
3x08W	28.76	3660	645x635
4x08W	38.10	4880	1262x338 & 645x635
1x14W	17.62	2200	645x338
2x14W	34.34	4400	645x338 & 1262x338
3x14W	51.92	6600	645x635
4x14W	68.52	8800	1262x338 & 645x635

Code

PBS-LED/4X08/6X3/LO/30/SD

Product Series	# of boards	Wattage(W)	Nominal Dimensions	Diffuser Type	CCT	Driver						
PBS-LED Plaster	1	1 Board	08	8W	6x3	600x300	LO MP	White Acrylic Microprism	30 40	3000K 4000K	ND DALI SD	Non Dim DALI Dim Switch Dim
	2	2 Board	14	14W	6x6	600x600						
	3	3 Board			12x3	1200x300						
	4	4 Board			12x6	1200x600						

Specifications subject to change without notice.

