

PRYSM

LED SURFACE MOUNTED LOWBAY

5
YR
WARRANTY

IP65

IK08






Key Features

- Square (S) or round (R).
- CRI >80, CRI >90 available on request.
- L80 B20, >80 000 hrs @ tc = 85°C.
- Minimum colour tolerance: 3SDCM.
- UV stabilized polycarbonate diffuser.
- Non-dim or DALI.
- Suitable for undercover carpark, service corridors, internal and external walkways.

Dimensions

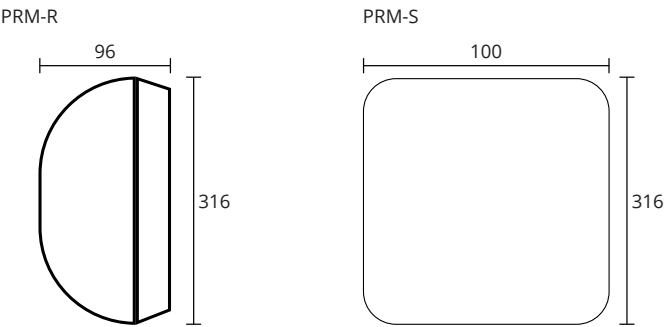

Code

PRM-S/16/40/ND

Product Series		Wattage			CCT		Driver	
PRM-S	Square	11	11W	1905lm	30	3000K	ND	Non Dim
		16	16W	2665lm	40	4000K	DALI	DALI Dim
RM-R	Round	24	24W	3610lm	50	5000K		
		13	13W	2050lm				
		19	19W	2965lm				

See Technical Information Table for configurations options
Specifications subject to change without notice

