



Key Features

Optical Systems	Opal polycarbonate 110° Beam Angle	CCT	3000K 4000K 5000K
Mounting Type	Recessed	Colour Consistency (LED Module)	3 SDCM
Finish Options	White	COI Compliant	N/A
Warranty	5 Years	Lumen Output	750 - 2300lm
CRI	≥80	Lifetime	50,000hrs

Application

ELL is suitable for general thoroughfares, apartments, offices, covered outdoor and wet environments.

Design

Opal polycarbonate diffuser. Covered insulation IC Certification.

Installation

Recessed into 150mm and 200mm cutout sizes. ELL utilises spring clips for mounting as it allows for a shallow trim and makes installation as simple as cut, connect then fit. ELL can also be insulation covered (IC-4 rated).

Notes


- Data value may change depending on configurations and product availability.

Configurations

Non Dim System wattage (Watts)	Colour Temperature	Output (lm)	Cutout (C)	Faceplate Diameter (D)	Height (H)
8	3000K	750	150mm / 200mm	172mm / 225mm	142 mm
	4000K, 5000K	800			
12	3000K	1100	150mm / 200mm	172mm / 225mm	142 mm
	4000K, 5000K	1200			
18	3000K	1650	150mm / 200mm	172mm / 225mm	142 mm
	4000K, 5000K	1800			
25	3000K	2150	150mm / 200mm	172mm / 225mm	142 mm
	4000K, 5000K	2300			


Specifications subject to change without notice.

Photometrics

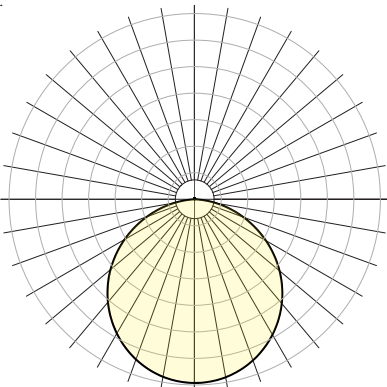

Nominal polar curve
ELL; 25W, 4000K

Dimensions

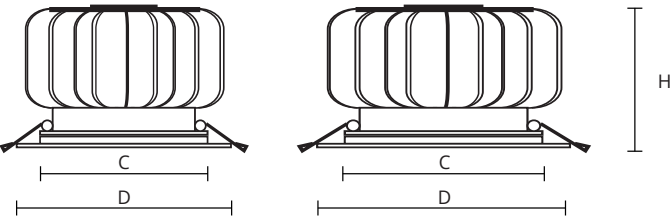

Code

ELL / 08/17 / 40 / W / ND

Product Series	Power/Size		CCT		Finish		Driver	
ELL	08/17	8W - 172mm	30	3000K	W	White	ND	Non Dim
	08/22	8W - 225mm	40	4000K				
	12/17	12W - 172mm	50	5000K				
	12/22	12W - 225mm						
	18/17	18W - 172mm						
	18/22	18W - 225mm						
	25/17	25W - 172mm						
	25/22	25W - 225mm						