

DOME / DS65, D75

LED DOWNLIGHT

IP54

CE

CB



UGR < 19

Order options

SYSTEM POWER

9W
13W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 90

ELECTRICAL

Non-Dim
Phase Dim
1-10V
DALI

LENS



25° Beam 50° Beam


REFLECTOR



Matt White Black


D75

3000K
(Standard)



Light distribution for 3000K

7.5W 700 lm-750 lm

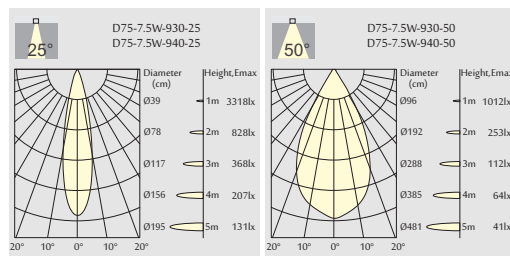


Order Information

D75-7.5W 700-750 Lm MODELS (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
D75-7.5W-930-25	1000 lm	700 lm	31 V	250 mA	7.5W	9W	90	3000K	25°
D75-7.5W-940-25	1100 lm	750 lm	31 V	250 mA	7.5W	9W	90	4000K	25°
D75-7.5W-930-50	1000 lm	700 lm	31 V	250 mA	7.5W	9W	90	3000K	50°
D75-7.5W-940-50	1100 lm	750 lm	31 V	250 mA	7.5W	9W	90	4000K	50°

11W 900 lm-950 lm

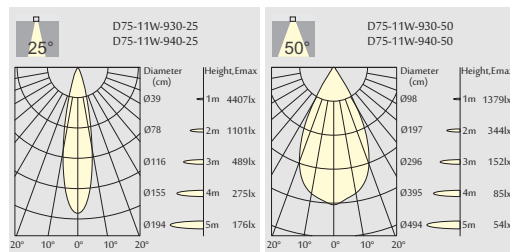

Order Information

D75-11W 900-950 Lm MODELS (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
D75-11W-930-25	1300 lm	900 lm	31 V	350 mA	11W	13W	90	3000K	25°
D75-11W-940-25	1400 lm	950 lm	31 V	350 mA	11W	13W	90	4000K	25°
D75-11W-930-50	1300 lm	900 lm	31 V	350 mA	11W	13W	90	3000K	50°
D75-11W-940-50	1400 lm	950 lm	31 V	350 mA	11W	13W	90	4000K	50°

