

Key Features

Optical Systems	PMMA Diffuser 90°	CCT	Tunable White (2700K-6500K)
Mounting Type	Recessed	Colour Consistency (LED Module)	3 SDCM
Finish Options	White	COI Compliant	N/A
Warranty	5 Years	Luminaire Efficacy (lm/w)	102
CRI	>90	Lifetime	L80/B10 at 25°C, 40000hrs

Application

Office, Conference rooms, Comercial, Retail & Education Facilitis

Design

TWP is constructed out of extruded aluminium for a reliability and PMMA diffuser for exceptional light output.

Installation

Mounting in a stanard 38mm T-Bar, but can also be surface and recessed with additonal frames.

Notes


- Data value may change depending on configurations and product availability.

Configurations

Configurations	Wattage	Lumens	Dimensions (mm) (LxWxH)
TWP-12x3-40-90-TW-DA	40W	4100	1195x295x11
TWP-6x6-40-90-TW-DA		4600	595x595x11


Specifications subject to change without notice.

Spectral Distribution & Photometrics

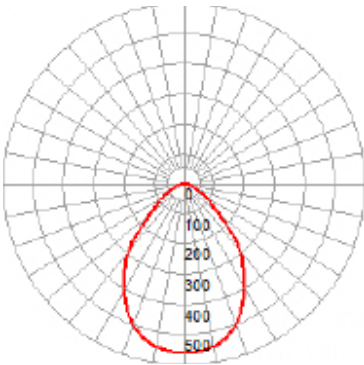

1200x300, 40W

Dimensions

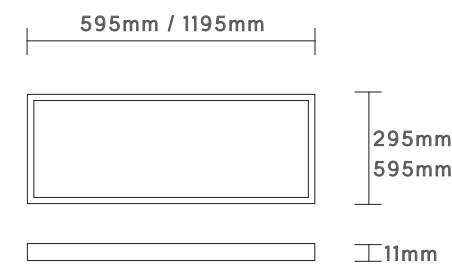

Code

TWP-12X3-40-90-TW-DA

Product Series	Size (Nominal)		Wattage		CRI		CCT		Driver	
TWP	6x6 12x3	600mm x 600mm x 11mm 1200mm x 300mm x 11mm	40	40 Watts	90	CRI>90	TW	Tunable White (2700K-6500K)	DA	DALI2