


ICU / ICU1X70

LED DOWNLIGHT
ADJUSTABLE



Order options

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 90

ELECTRICAL-Remote driver

non DIM
phase DIM
1-10V
DALI

ICU1X70



LENS



15°Beam 25°Beam 30°Beam

TRIM



White

Black

DECORATION RING




Black

White

Gold

Light distribution for 3000K


13W 1200 lm-1300 lm

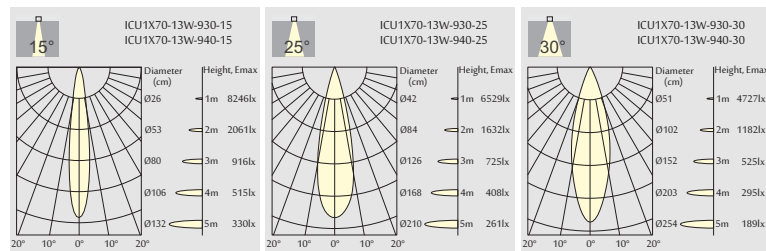

Order Information

ICU1X70-13W 1200 Lm MODELS		(CITIZEN LED)							
Code	LED output	Downlight output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ICU1X70-13W-930-15	1500 lm	1200 lm	36 V	350 mA	13 W	15 W	90	3000K	15°
ICU1X70-13W-940-15	1600 lm	1300 lm	36 V	350 mA	13 W	15 W	90	4000K	15°
ICU1X70-13W-930-25	1500 lm	1200 lm	36 V	350 mA	13 W	15 W	90	3000K	25°
ICU1X70-13W-940-25	1600 lm	1300 lm	36 V	350 mA	13 W	15 W	90	4000K	25°
ICU1X70-13W-930-30	1500 lm	1200 lm	36 V	350 mA	13 W	15 W	90	3000K	30°
ICU1X70-13W-940-30	1600 lm	1300 lm	36 V	350 mA	13 W	15 W	90	4000K	30°

18 W 1600lm-1700lm

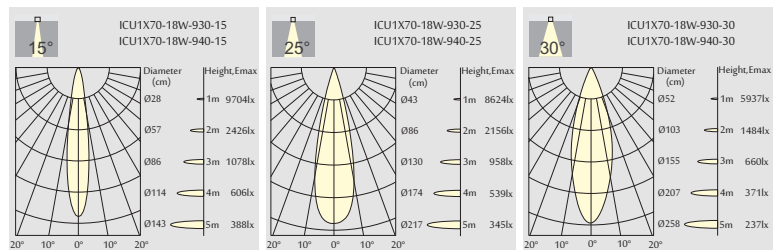

Order Information

ICU1X70-18W 1600 Lm MODELS

(CITIZEN LED)

Code	LED output	Module output	CD	LED Power	System Power	CRI	CCT	BEAM
ICU1X70-18W-930-15	2000 lm	1600 lm	9709cd	18 W	21 W	90	3000K	15°
ICU1X70-18W-940-15	2100 lm	1700 lm	10616 cd	18 W	21 W	90	4000K	15°
ICU1X70-18W-930-25	2000 lm	1600 lm	8624 cd	18 W	21 W	90	3000K	25°
ICU1X70-18W-940-25	2100 lm	1700 lm	9494 cd	18 W	21 W	90	4000K	25°
ICU1X70-18W-930-30	2000 lm	1600 lm	5939 cd	18 W	21 W	90	3000K	30°
ICU1X70-18W-940-30	2100 lm	1700 lm	6837 cd	18 W	21 W	90	4000K	30°

For black housing: ICU1X70B

E.g. ICU1X70B-13W-930-15-13W, 3000K, 15° beam, Black housing.