

EDB


LED DIFFUSED BATTEN



Key Features

- Built-in high efficiency SMD chips.
- Highly transparent opal polycarbonate diffuser.
- Variable wattage, switch between 10/21W, 21/42W.
- Available in 4000K and 6500K.
- Large 6mm terminal block for easy installation.
- Quick install modular design.
- Emergency option.
- CRA ≥ 80 .
- 50,000 hour lifetime.
- L70 / B50.
- White finish.

Dimensions

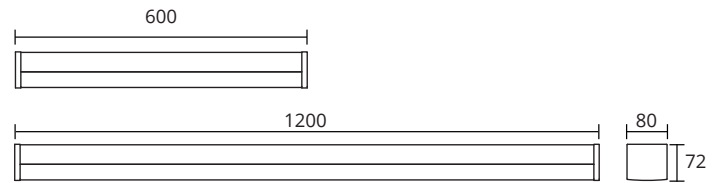

Code

EDB/10/21/40/ND

Product Series	Wattage (W)	CCT	Driver
EDB	10/21 21/42 (900lm) (1850/3800lm)	40 4000K 65 6500K	ND Non Dim NM Non

Specifications subject to change without notice.

