

BLT


LED TROFFER



Key Features

- L80 B10.
- Rated 70,000 hours.
- CRI>80.
- SELV.
- Future proof replaceable gear tray.
- Available in rod or wire suspension with BLT-S only.
- Available in plaster recessed, surface mount, suspended, T-Bar recessed (38mm standard T-Bar).
- High CRI available upon request.

Dimensions

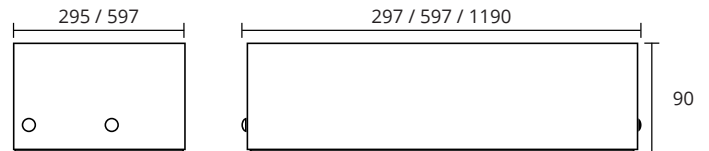

Cutout Dimension	Fitting Dimension
315x295	297x295
596x311	597x295
1196x311	1190x295
605x605	597x597

Technical Information

Configurations	Non Dim System Wattage (W)	Combined Board Output (lm)	Dimensions (mm)
4x7.2W	33	4400	297x295
1x08W	10.6	1220	597x295
2x08W	22.2	2440	597x295 & 1200x295
3x08W	28.76	3660	597x597
4x08W	38.1	4880	1190x295 & 597x597
1x14W	17.62	2200	597x295
2x14W	34.34	4400	597x295 & 1190x295
3x14W	51.92	6600	597x597
4x14W	68.52	8800	1190x295 & 597x597

Code

BLT-TB/4X14/12X3/LO/40/ND

Product Series	# of Boards	Wattage (W)	Nominal Dimensions	Diffuser Type	CCT	Driver
BLT-TB T - Bar	1	07	3x3	LO	30	ND
BLT-PB Plaster	2	08	6x3	MP	40	DALI
BLT-SM Surface Mount	3	14	6x6			SD
	4		12x3			
		7 Watts	300x300	White Acrylic	3000K	Non Dimming
		8 Watts	600x300	Microprism	4000K	DALI Dimming
		14 Watts	600x600			Switch Dimming
			1200x300			

Luminous flux figures based on Opal, 4000K, CRI>90 version
Specifications subject to change without notice.

