

FHLP-LED


LED DIFFUSED BATTEN



Key Features

- Rated 70,000 hours. L80 B10.
- CRI>80.
- Squareline batten range fabricated from 0.7mm zincseal steel with powder coated white finish.
- White metal end caps, screw fixed to the fitting body.
- Formed with microprism or frosted diffuser.
- Wide body or narrow body available.
- Available in 1.0mm aluminium body for marine/corrosive environment (FHLPAL-LED).
- Suitable for fixing directly to ceiling or may be suspended with chains or rods.

Dimensions

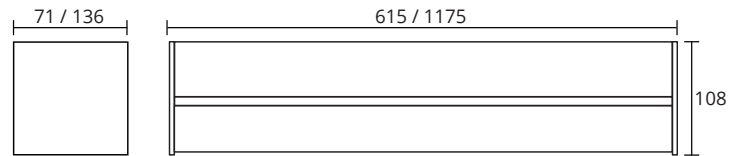

Technical Information

Configuration	Non Dim System Wattage (W)	Combined board output (lm)	Dimensions (mm)
1x08W	10.6	1220	615/N
2x08W	22.20	2440	615/W & 1175/N
4x08W	38.10	4880	1175/W
1x14W	17.62	2200	615/N
2x14W	34.34	4400	615/W & 1175/N
4x14W	68.52	8800	1175/W

Code

FHLP-LED/2X08/12/N/MP/40/ND

Product Series		# Boards		Wattage (W)		Nominal Dimensions		Fitting Width		Diffuser		CCT		Driver	
F HLP-LED	Steel Body	1	1 Board	8	8 Watts	6	600 mm	N	Narrow	MP	Microprism (Standard)	30	3000K	ND	Non Dim
F HLPAL-LED	Aluminium Body	2	2 Board	14	14 Watts	12	1200 mm	W	Wide	LO	White Acrylic	40	4000K	DALI	DALI Dim
		4	4 Board											SD	Switch Dim

See Technical Information Table for configurations options.
Specifications subject to change without notice.