

iSTART 150 - SQUARE

LED Downlight



Quick info

GENERAL

Recessed

Adjustable

Fixed

Trimmed

Trimless

Square

LED

COB LED module

3000K, 4000K

CRI>90

Binning < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

Direct Illumination

Beam angle 20°, 25°, 35°, 40°, 50°

PHYSICAL

Aluminium

Powder coating

Function


iSTART 150 is a versatile series comprising of adjustable and fixed fittings available in trimmed or trimless.

iSTART streamlines the process with a single light engine, with an adjustable head that offers flexible positioning, with 355° rotation and 90° pivot capabilities.

A smart mechanical design ensures precise alignment.

Features

30° tilt and 355° rotation

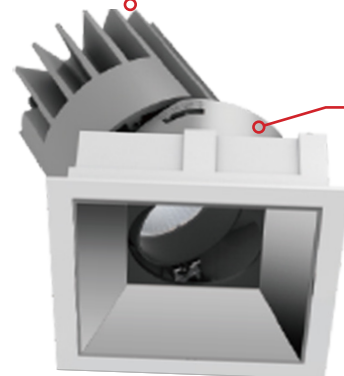


Easy to adjust
Precision engineered
adjustment mechanism
achieves accurate angle
alignment

Dimensions


SSA150/SSF150

147mm x 147mm cutout



TSA150/TSF150

154mm x 154mm cutout



iSTART 150 - SQUARE

LED Downlight

Ordering info

SYSTEM POWER

28W
42W

COLOUR TEMPERATURE

3000K
4000K

COLOUR RENDERING INDEX

CRI>90

ELECTRICAL

Non-Dim
Phase-Dim
1-10V Dim
DALI

HOUSING

White
Black
Trimless

LENS



20° Beam



25° Beam



35° Beam



50° Beam

Technical Information

Fitting	Module Output	LED Wattage	System Wattage	CRI	Beam
SSF150-25W-930	1900lm	25W	28W	90	25°/ 35°/ 50°
SSF150-25W-940	2000lm	25W	28W	90	25°/ 35°/ 50°
SSF150-25W-930	2700lm	38W	42W	90	25°/ 35°/ 50°
SSF150-25W-940	2900lm	38W	42W	90	25°/ 35°/ 50°
TSF150-25W-930	1900lm	25W	28W	90	25°/ 35°/ 50°
TSF150-25W-940	2000lm	25W	28W	90	25°/ 35°/ 50°
TSF150-38W-930	2700lm	38W	42W	90	25°/ 35°/ 50°
TSF150-38W-940	2900lm	38W	42W	90	25°/ 35°/ 50°
SSA150-25W-930	2400lm	25W	28W	90	20°/ 35°
SSA150-25W-940	2500lm	25W	28W	90	20°/ 35°
SSA150-25W-930	1700lm	25W	28W	90	50°
SSA150-25W-940	1800lm	25W	28W	90	50°
SSA150-38W-930	3200lm	38W	42W	90	20°/ 35°
SSA150-38W-940	3300lm	38W	42W	90	20°/ 35°
SSA150-38W-930	2600lm	38W	42W	90	50°
SSA150-38W-940	2700lm	38W	42W	90	50°
TSA150-25W-930	2400lm	25W	28W	90	20°/ 35°
TSA150-25W-940	2500lm	25W	28W	90	20°/ 35°
TSA150-25W-930	1700lm	25W	28W	90	50°
TSA150-25W-940	1800lm	25W	28W	90	50°
TSA150-38W-930	3200lm	38W	42W	90	20°/ 35°
TSA150-38W-940	3300lm	38W	42W	90	20°/ 35°
TSA150-38W-930	2600lm	38W	42W	90	50°
TSA150-38W-940	2700lm	38W	42W	90	50°

Ordering Information

XXX150 - XXW - XX - XX - XX - ND - XX

Fitting	Wattage	CRI	CCT	Lens	Controls	Finish
(SSF) Square Fixed Downlight (SSA) Square Adjustable Downlight (TSF) Trimless Square Fixed Downlight (TSA) Trimless Square Adjustable Downlight	(25) 25W (38) 38W	(30) 3000K (40) 4000K	(90) CRI>90	(20) 20° (25) 25° (35) 35° (45) 45° (50) 50°	(ND) Non-Dim (PH) Phase-Dim (1-10) 1-10V Dim (DA) DALI	(10) Black (11) White

PLEASE REPLACE XX WITH THE FIGURE INSIDE THE BRACKETS LOCATED IN THE TABLE.