

SIGNAGE
&
SENSORS

FLE MKII


24M EXIT SIGN



Key Features

- Complies to AS2293 standards.
- Slide connect bracket.
- Interchangeable diffusers (included).
- Maintained system.
- Viewing distance 24m.
- Ceiling and wall mount compatible.
- Double sided.
- NI-MH battery.

Dimensions

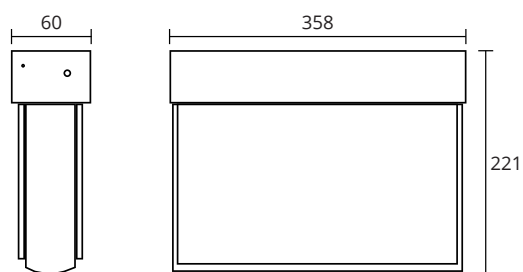

Accessories



Interchangeable diffuser
1



Interchangeable diffuser
2



Interchangeable diffuser
3

Code

FLE-II/LED

Product Series	CCT
FLE-II	LED 4W LED

Specifications subject to change without notice.

SCC


WALL MOUNTED SIGN BOX



Key Features

- Wall mounted sign box.
- Opal acrylic sign face.
- Fabricated Steel body—finished in white powdercoat.
- Sign face removal with tool.
- Text options to suit customers requirements eg:
 - X-RAY ON
 - DARK ROOM IN USE
 - INTERVIEW IN PROGRESS
- For ceiling mounted version please contact FOS Lighting.

Dimensions

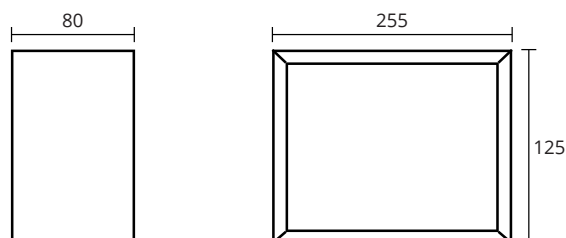

Code

SCC/LED/ND

Product Series	LED Type		Driver	
SCC	LED SP	LED Strips Special Colours and Size	ND DALI	Non Dimmable DALI Dimmable Ballast

Specifications subject to change without notice.

STL MKII


STARLIGHT LED EMERGENCY



Key Features

- Fully approved to AS2293 standards.
- Emergency classification: C0: D40, C90: D40.
- Sustained emergency system.
- Optional surface mounting box.
- Lithium battery.
- 1.2m flex and plug.
- 140mm and 88mm adapter plates included.

Dimensions

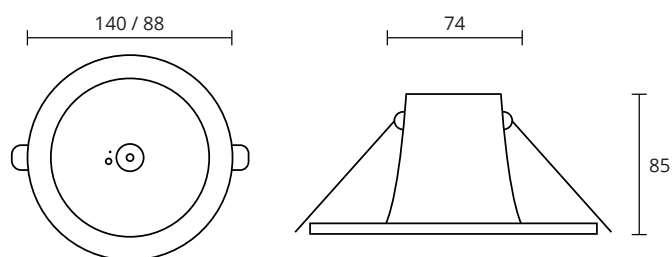

Accessories



Surface mount box

Code

STL-II/R/LED

Product Series		CCT	
STL-II/R	Recessed	LED	2W LED
STL-II/S	Surface Mount		

Specifications subject to change without notice.

RCC


RECESSED SIGN BOX



Key Features

- Recessed sign box.
- Formed opal acrylic sign face.
- Fabricated Steel body finished in white powdercoat.
- Sign face removal with tool.
- Text and colour options to suit customers requirements eg:
 - X-RAY ON
 - DARK ROOM IN USE
 - INTERVIEW IN PROGRESS

Dimensions

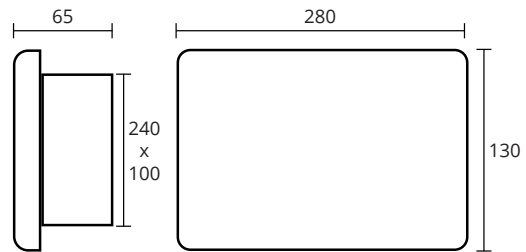

Code

RCC/LED/DRIVER

Product Series	LED Type		Driver	
	LED	LED Strips	ND	Non Dimmable
RCC				

Specifications subject to change without notice



FOS

lighting

info@foslighting.com.au

foslighting.com.au

1300 241 087

FOS Lighting reserves the right to make any changes without prior notification