


iSTART 100 - SQUARE

LED Downlight

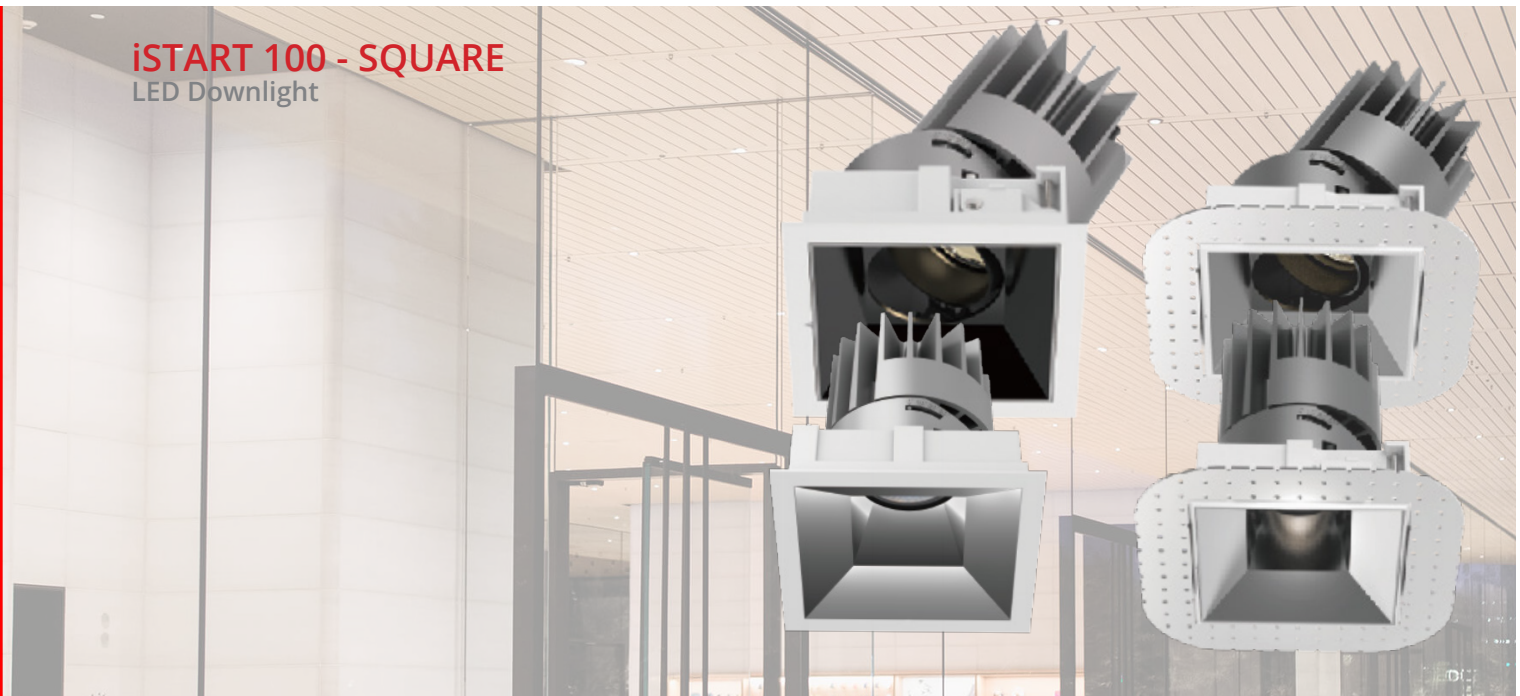

Quick info

GENERAL

Recessed
Adjustable
Fixed
Trimmed
Trimless
Square

LED

COB LED module
3000K, 4000K
CRI>90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

Direct Illumination
Beam angle 20°, 30°, 36°, 40°, 50°

PHYSICAL

Aluminium
Powder coating

Function

START 100 is a versatile series comprising of adjustable and fixed fittings available in trimmed or trimless.

START streamlines the process with a single light engine, with an adjustable head that offers flexible positioning, with 355° rotation and 90° pivot capabilities.


A smart mechanical design ensures precise alignment.

Features

30° tilt and 355° rotation

Adjustable
Features precise
angle alignment


Easy to adjust
Precision engineered
adjustment mechanism
achieves accurate angle
alignment

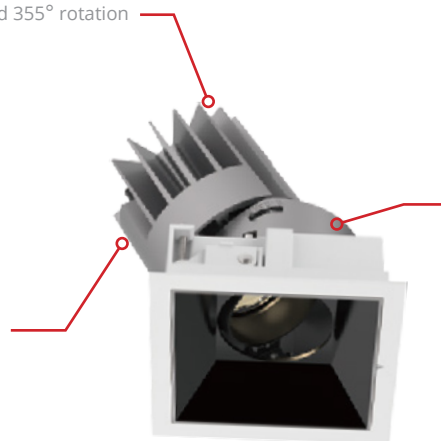


Fixed version available

Dimensions


SSA100 - 13/18W




SSA100 - 25W



TSA100 - 13/18W



TSA100 - 25W



iSTART 100

LED Downlight Adjustable

Ordering info

SYSTEM POWER

15W
21W
28W

COLOUR TEMPERATURE

3000K
4000K

COLOUR RENDERING INDEX

CRI>90

ELECTRICAL

Non-Dim
Phase-Dim
1-10V Dim
DALI

HOUSING

White
Black
Trimless

REFLECTOR



20° Beam



30° Beam



36° Beam



40° Beam



45° Beam



50° Beam

Technical Information

Fitting	Module Output	LED Wattage	System Wattage	CRI	Beam
SSF100-13W-930	1050lm	13W	15W	90	20°/45°
SSF100-13W-940	1100lm	13W	15W	90	20°/45°
SSF100-25W-930	1100lm	13W	15W	90	30°/40°
SSF100-25W-940	1200lm	13W	15W	90	30°/40°
SSF100-18W-930	1400lm	18W	21W	90	20°/45°
SSF100-18W-940	1500lm	18W	21W	90	20°/45°
SSF100-13W-930	1500lm	18W	21W	90	30°/40°
SSF100-13W-940	1600lm	18W	21W	90	30°/40°
SSF100-25W-930	1800lm	25W	28W	90	20°/50°
SSF100-25W-940	1900lm	25W	25W	90	20°/50°
SSF100-18W-930	1900lm	25W	25W	90	36°
SSF100-18W-940	2000lm	25W	25W	90	36°
TSF100-13W-930	1050lm	13W	15W	90	20°/45°
TSF100-13W-940	1100lm	13W	15W	90	20°/45°
TSF100-25W-930	1100lm	13W	15W	90	30°/40°
TSF100-25W-940	1200lm	13W	15W	90	30°/40°
TSF100-18W-930	1400lm	18W	21W	90	20°/45°
TSF100-18W-940	1500lm	18W	21W	90	20°/45°
TSF100-13W-930	1500lm	18W	21W	90	30°/40°
TSF100-13W-940	1600lm	18W	21W	90	30°/40°
TSF100-25W-930	1800lm	25W	28W	90	20°/50°
TSF100-25W-940	1900lm	25W	25W	90	20°/50°
TSF100-18W-930	1900lm	25W	25W	90	36°
TSF100-18W-940	2000lm	25W	25W	90	36°

Ordering Information

XXX100 - XXW - XX - XX - XX - ND - XX

Fitting	Wattage	CRI	CCT	Lens	Controls	Finish
(SSF) Square Fixed Downlight (SSA) Square Adjustable Downlight (TSF) Trimless Square Fixed Downlight (TSA) Trimless Square Adjustable Downlight	(13) 13W (18) 18W (25) 25W	(30) 3000K (40) 4000K	(90) CRI>90	(20) 20° (30) 30° (36) 36° (40) 40° (45) 45° (50) 50°	(ND) Non-Dim (PH) Phase-Dim (1-10) 1-10V Dim (DA) DALI	(10) Black (11) White

PLEASE REPLACE XX WITH THE FIGURE INSIDE THE BRACKETS LOCATED IN THE TABLE.

iSTART 100

LED Downlight Adjustable

Ordering info

SYSTEM POWER

15W
21W
28W

COLOUR TEMPERATURE

3000K
4000K

COLOUR RENDERING INDEX

CRI>90

ELECTRICAL

Non-Dim
Phase-Dim
1-10V Dim
DALI

HOUSING

White
Black
Trimless

REFLECTOR



20° Beam



30° Beam



36° Beam



40° Beam



45° Beam



50° Beam

Technical Information

Fitting	Module Output	LED Wattage	System Wattage	CRI	Beam
SSA100-13W-930	1100lm	13W	15W	90	20°/45°
SSA100-13W-940	1200lm	13W	15W	90	20°/45°
SSA100-25W-930	1200lm	13W	15W	90	30°/40°
SSA100-25W-940	1300lm	13W	15W	90	30°/40°
SSA100-18W-930	1600lm	18W	21W	90	20°/45°
SSA100-18W-940	1700lm	18W	21W	90	20°/45°
SSA100-13W-930	1700lm	18W	21W	90	30°/40°
SSA100-13W-940	1800lm	18W	21W	90	30°/40°
SSA100-25W-930	2100lm	25W	28W	90	20°
SSA100-25W-940	2200lm	25W	25W	90	20°
SSA100-18W-930	2200lm	25W	25W	90	36°/50°
SSA100-18W-940	2300lm	25W	25W	90	36°/50°
TSA100-13W-930	1100lm	13W	15W	90	20°/45°
TSA100-13W-940	1200lm	13W	15W	90	20°/45°
TSA100-25W-930	1200lm	13W	15W	90	30°/40°
TSA100-25W-940	1300lm	13W	15W	90	30°/40°
TSA100-18W-930	1600lm	18W	21W	90	20°/45°
TSA100-18W-940	1700lm	18W	21W	90	20°/45°
TSA100-13W-930	1700lm	18W	21W	90	30°/40°
TSA100-13W-940	1800lm	18W	21W	90	30°/40°
TSA100-25W-930	2100lm	25W	28W	90	20°
TSA100-25W-940	2200lm	25W	25W	90	20°
TSA100-18W-930	2200lm	25W	25W	90	36°/50°
TSA100-18W-940	2300lm	25W	25W	90	36°/50°

Ordering Information

XXX100 - XXW - XX - XX - XX - ND - XX

Fitting

(SSF) Square Fixed Downlight
(SSA) Square Adjustable Downlight
(TSF) Trimless Square Fixed Downlight
(TSA) Trimless Square Adjustable Downlight

Wattage

(13) 13W
(18) 18W
(25) 25W

CRI

(30) 3000K
(40) 4000K

CCT

(90) CRI>90

Lens

(20) 20°
(30) 30°
(36) 36°
(40) 40°
(45) 45°
(50) 50°

Controls

(ND) Non-Dim
(PH) Phase-Dim
(1-10) 1-10V Dim
(DA) DALI

Finish

(10) Black
(11) White

PLEASE REPLACE XX WITH THE FIGURE INSIDE THE BRACKETS LOCATED IN THE TABLE.