




TREK BOLLARD

Design: ECLATEC

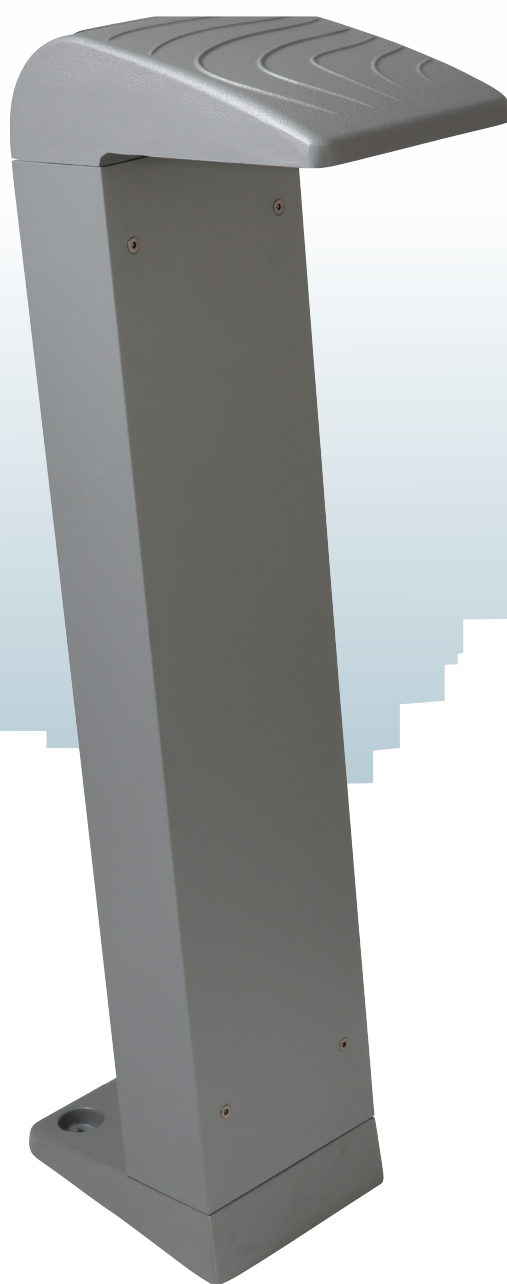

TREK

Design: ECLATEC

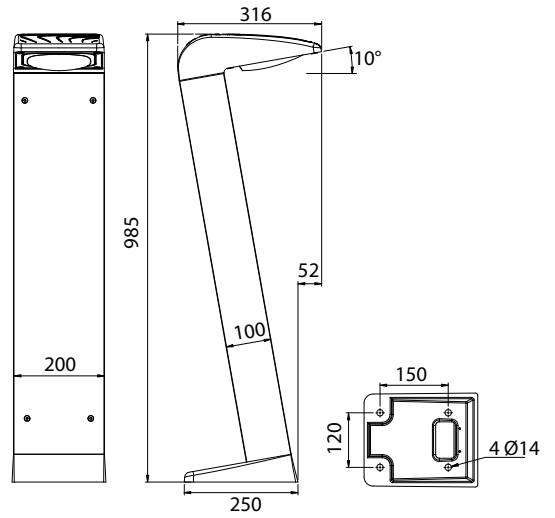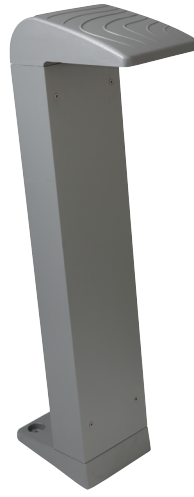

DESCRIPTION

Product name	TREK
Housing	Lighting head and module in die-cast aluminium Aluminium profile 200 x 100 mm tube
Bowl	Polycarbonate
Finish	Polyester powder coating, any colour available
Impact protection	IK 10
Ingress Protection	IP 66 Module
Dimensions(L x l x h)	200 x 316 x 985 mm
Weight	23kg
Watts/lumens	

SOURCES & PHOTOMETRIC DISTRIBUTIONS

TREK	
Sources	BLS 8
Colour temperature	2400 K, 2700 K, 3000 K, 4000 K
Optical Distribution	QUADRALENS: EAH, ERS
Backlight shield option	Medium or strong cut-off
Power supply current	Adjustable up to 700 mA ⁽¹⁾

(1) >700mA possible on request
E/L/P: Lighting/Luminance/Projection, R/C/T/F/P: Road/Circular/Pavement/Beam/Zebra crossing, E/S/L/A/D/G: Narrow/Standard/Wide/Asymmetrical/Right/Left

INSTALLATION



Cast iron base
Internal fixing using 4 anchor rods, Ø 12 mm

MAINTENANCE

Opening and closing	Removable lighting head Access to the equipment after removal of the profiled tube
---------------------	---

CONTROL OPTIONS

TREK bollard by Eclatec represents the latest in control systems, both centralised and decentralised. Adjustable current on the driver or at the bottom of the pole. Dimming as above as well as via bluetooth.

The bollard supports remote and built in detection. Smart-Ready^(R) configuration (ZD4i) . TREK also supports DALI protocol. When used with a local network, communication can be detected with a pilot wire and/or wireless communication sensing. Remote management via WIZARD CMS system.

