


ICU / ICU1X30

LED DOWNLIGHT
ADJUSTABLE



Order options

COLOUR TEMPERATURE

2700K
3000K
4000K


COLOUR RENDERING INDEX

CRI 90

ELECTRICAL-Remote driver


non DIM
phase DIM
1-10V
DALI

ICU1X30

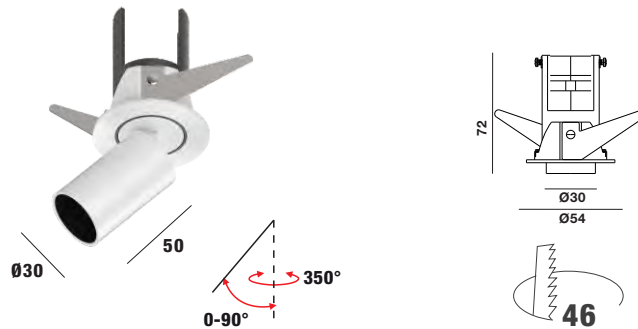


Light distribution for 3000K

LENS




TRIM



DECORATION RING



4W 300 lm-350 lm

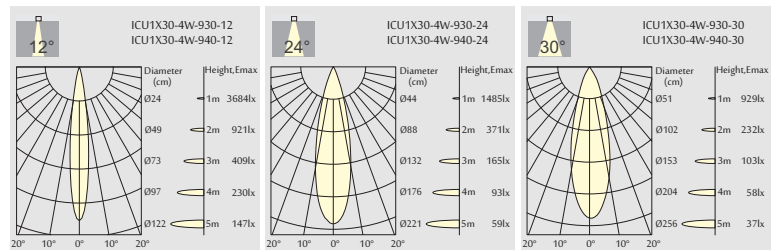

Order Information

ICU1X30-4W 300 Lm MODELS		(CREE LED)							
Code	LED output	Downlight output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ICU1X30-4W-930-12	400 lm	300 lm	12 V	350 mA	4 W	6 W	90	3000K	12°
ICU1X30-4W-940-12	450 lm	350 lm	12 V	350 mA	4 W	6 W	90	4000K	12°
ICU1X30-4W-930-24	400 lm	300 lm	12 V	350 mA	4 W	6 W	90	3000K	24°
ICU1X30-4W-940-24	450 lm	350 lm	12 V	350 mA	4 W	6 W	90	4000K	24°
ICU1X30-4W-930-30	400 lm	300 lm	12 V	350 mA	4 W	6 W	90	3000K	30°
ICU1X30-4W-940-30	450 lm	350 lm	12 V	350 mA	4 W	6 W	90	4000K	30°

For black housing: ICU1X30B
E.g. ICU1X30B-4W-930-12-4W, 3000K, 12° beam, Black housing.