

# STL MKII


## STARLIGHT LED EMERGENCY



### Key Features

- Fully approved to AS2293 standards.
- Emergency classification: C0: D40, C90: D40.
- Sustained emergency system.
- Optional surface mounting box.
- Lithium battery.
- 1.2m flex and plug.
- 140mm and 88mm adapter plates included.

### Dimensions

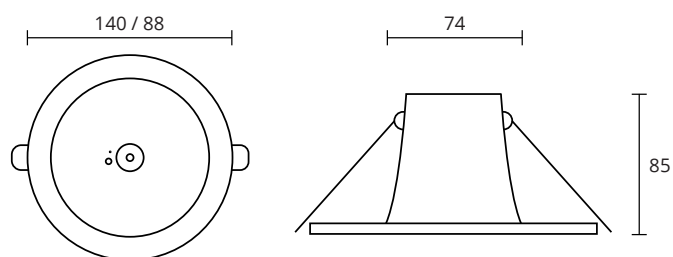

### Accessories



Surface mount box

### Code

#### STL-II/R/LED

Product Series		CCT	
STL-II/R	Recessed	LED	2W LED
STL-II/S	Surface Mount		

Specifications subject to change without notice.

