


OB-LED

LED OVERBED LIGHT

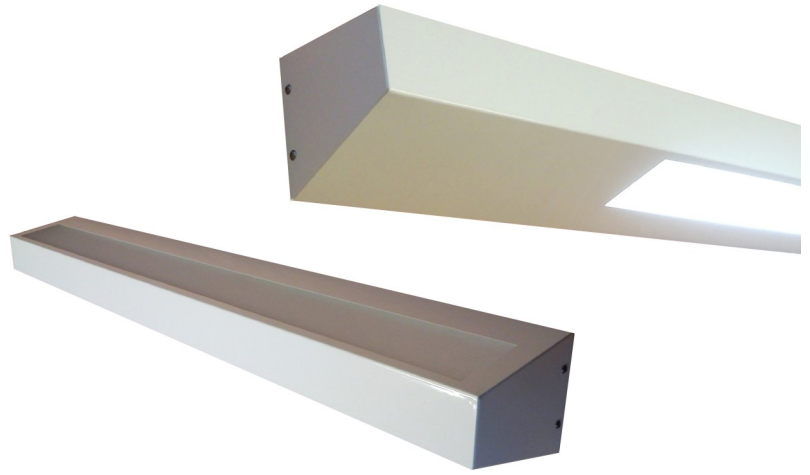

FEATURES

- L80 B10.
- 10 year warranty (standard TCI).
- Rated at 70,000 hrs.
- Wall mounted luminaire designed to meet lighting requirements for hospitals, nursing homes and aged care facilities.
- Separately switched upward lighting and downward lighting.
- Upward light will provide general room lighting while downward lighting will provide specific task lighting eg. Reading light.
- Available with a range of prismatic or opal diffusers.
- Standard Fitting Powder coated white, other colours available upon request.
- 8W LED boards - 1220 Lumens Output.
- 14W LED boards - 2200 Lumens Output


TECHNICAL INFORMATION

Contact Frend for other lighting configurations

Configurations	Non Dim System Wattage	Combined Board Output (lm)	Nominal Dimensions (mm)
1x08W	10.6	1220	600
2x08W	22.20	2440	1200
1x14W	17.62	2200	600
2x14W	34.34	4400	1200

SPECIFICATIONS

Dimensions (mm)	
	Actual / Nominal
Length	606 / 600 1206 / 1200
Width	150
Depth	135



PRODUCT CODE

Example code: OB-LED/2X14U/2X08D/LO/40/ND

See Technical Information Table for configurations options.
Specifications subject to change without notice.

Product Series	Number of Boards	Upward Light	Downward Light	Diffuser Type	Colour Temperature	Driver
OB-LED	1	1x08U	1x08D	LO White Acrylic	30 3000K	ND Non Dim
	2	2x08U	2x08D	K12 K12 Prismatic	40 4000K	SD Switch Dim
		1x14U	1x14D	K19 K19 Prismatic		DALI DALI Dim
		2x14U	2x14D	K5 K5 Ribbed Diffuser		SEP/SW Separately Switched

FREND
lighting

phone 1300 241 087

fax (617) 3272 9000

email sales@foslighting.com.au

PO Box 268

14 Jaybel Street, Salisbury

Brisbane QLD 4107

www.frend.com.au