


# VEKTA V5075C

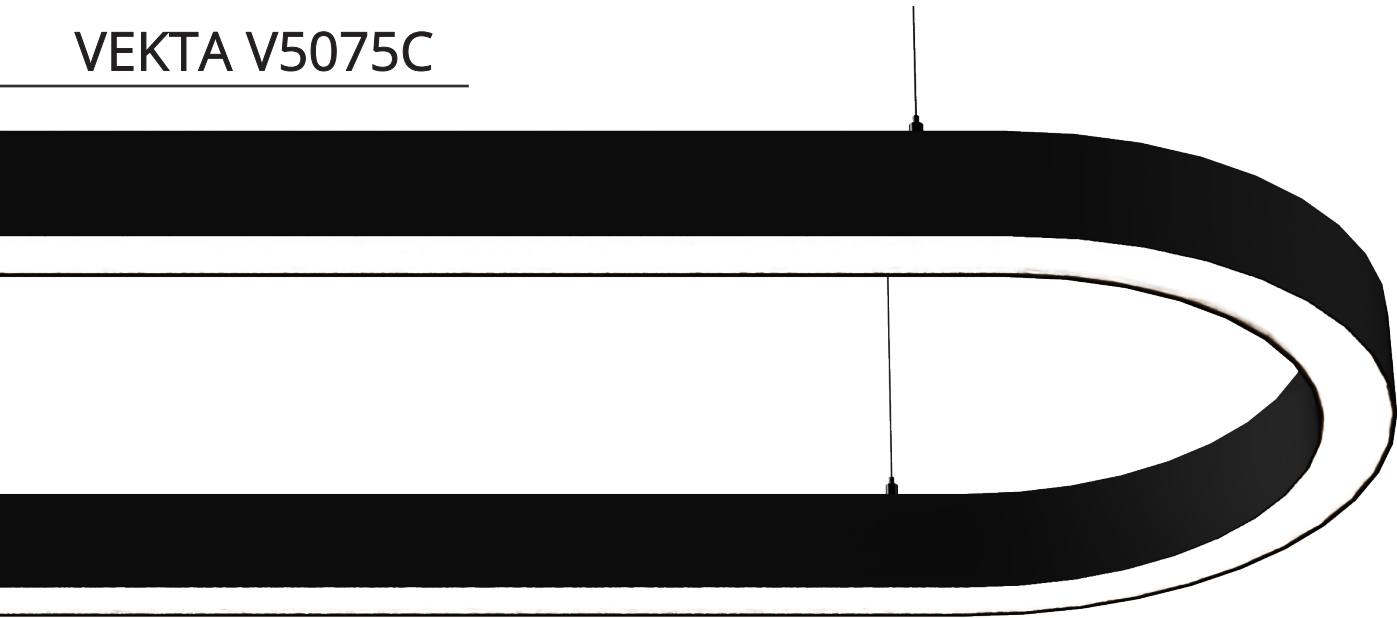

## Key Features


- Minimum bend radius is 500mm
- Custom curved Aluminium extruded profile
- Complies with relevant Australian standards
- Even illumination
- SELV LED Engine
- Detailed shop drawings
- Plug and play wire looms
- Typical length is 2.5m (longer lengths available on request)
- Other RAL colours available on request

## Compliance



\*Cyanosis compliant on request

## Colour Options



## Code

Example:

V5075C-S1090300DDO10-2400

Profile	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
V5075C	S - Surface Mount P - Pendant Wire D - Pendant Rod U - Up/Down Wire Pendant Y - Up/Down Rod Pendant	10 - 9.6 W/m (602lm/m) 15 - 14.4 W/m (903lm/m) 20 - 19.2W/m (1204lm/m) 28 - 28.8W/m (1806lm/m) 45 - 45W/m (2709lm/m)	80 - CRI>80 90 - CRI>90	30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K	OD - Opal	DO - Non-Dim DA - DALI-Dim SW - Switch-Dim CA - Casambi	10 - Black 11 - White 12 - Silver 13 - Gold Bronze CU - Custom	- XXXX mm

## Mounting

Surface Mounted (S)   Wire Pendant (P)  
Rod Pendant (D)   Up/Down Wire (U)  
Up/Down Rod (Y)



## Dimensions

