

MATRIX35-G

LED Downlight



Quick info

GENERAL

Recessed

Fixed

Round

LED

SMD LED module

3000K, 4000K

CRI>90

Binning < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

Direct Illumination

Beam angle 18°, 30°

PHYSICAL

Aluminium

Powder coating

Function

Designed with a minimalist aesthetic, this deep-recessed LED fixture features a sleek 35mm cutout and a soft, curved form.

Engineered for complete glare control and superior visual comfort, it offers a range of interchangeable beam angle lenses that are easily swapped without tools to suit various lighting needs.


Features

Spring clips for
easy installation

Deep reflector to
minimise glare



Dimensions



MATRIX35-G

LED Downlight

Ordering info

SYSTEM POWER
2.5W


COLOUR TEMPERATURE
3000K
4000K

COLOUR RENDERING INDEX
CRI>90

ELECTRICAL
Non-Dimmable

HOUSING
White
Black

LENS

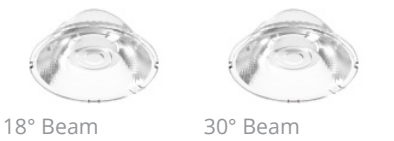

Technical Information

Fitting	Module Output	LED Wattage	System Wattage	CRI	Beam
MATRIX35-G-930-18	110lm	1.5W	2.5W	90	18°
MATRIX35-G-940-18	120lm	1.5W	2.5W	90	18°
MATRIX35-G-930-30	110lm	1.5W	2.5W	90	30°
MATRIX35-G-940-30	120lm	1.5W	2.5W	90	30°

Ordering Information

MATRIX35 - G - XXW - XX - XX - XX - ND - XX					
Wattage	CRI	CCT	Lens	Controls	Finish
(1.5) 1.5W	(30) 3000K (40) 4000K	(90) CRI>90	(18) 18° (30) 30°	(ND) Non-Dim	(10) Black (11) White

PLEASE REPLACE XX WITH THE FIGURE INSIDE THE BRACKETS LOCATED IN THE TABLE.