

DOME 100

Recessed Downlights



Quick info

GENERAL

Recessed

IP54

LED

COB LED module

2700K, 3000K, 4000K

CRI>80, CRI>90

Binning < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

Direct Illumination

Beam angle 30°, 50°

PHYSICAL

Aluminium

Powder coating


Function

Deep recessed design achieves super eye comfort. Attractive appearance with efficiency and functionality. Passive management ensures durability.


Optimal lens technology with a medium and flood beam angles guarantee light quality.

Interchangeable reflectors of matt, white and black colours provide maximum design freedom.

Features

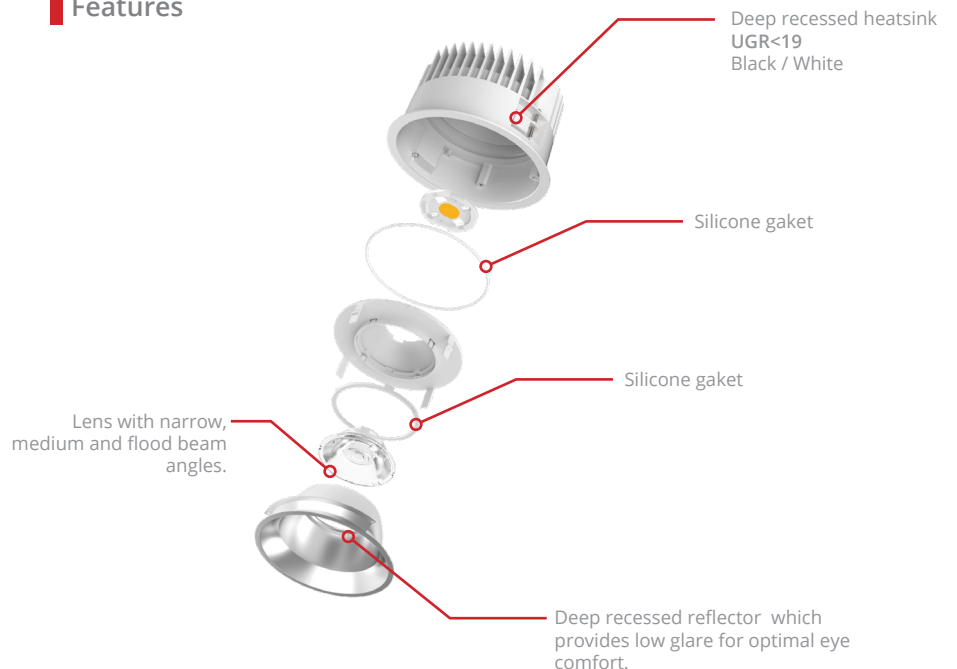

Dimensions



DOME 100 Recessed Downlights

Ordering info

SYSTEM POWER

10W
14W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI>80
CRI>90

ELECTRICAL

Non-Dim
Phase Dim
1-10V
DALI

LENS



30° Beam



50° Beam

REFLECTOR



Matt



White



Black

Technical Information

Fitting	Module Output	LED Wattage	System Wattage	CRI	Beam
D100-8.5W-830-30	1100lm	8.5W	10W	83	30°
D100-8.5W-840-30	1200lm	8.5W	10W	83	30°
D100-8.5W-830-50	1000lm	8.5W	10W	83	50°
D100-8.5W-840-50	1100lm	8.5W	10W	83	50°
D100-12W-830-30	1500lm	12W	14W	83	30°
D100-12W-840-30	1600lm	12W	14W	83	30°
D100-12W-830-50	1300lm	12W	14W	83	50°
D100-12W-840-50	1400lm	12W	14W	83	50°

Ordering Information

D100 - 8.5W - XX - XX - XX - XX - ND - XX

Wattage	CRI	CCT	Lens	Refelctor	Controls	Finish
(8.5W) 8.5 Watts (12) 12 Watts	(80) CRI>83 (90) CRI>90	(27) 2700K (30) 3000K (40) 4000K	(30) 30° (50) 50°	(MA) Matt (WH) White (BL) Black	(ND) Non-Dim (PD) Phase Dim (1-10V) 1-10V (DA) DALI	(10) Black (11) White

PLEASE REPLACE XX WITH THE FIGURE INSIDE THE BRACKETS LOCATED IN THE TABLE.