

DOME / D100,D150

LED DOWNLIGHT



Order options

SYSTEM POWER

21W
28W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 90

ELECTRICAL-Remote driver

Non-Dim
Phase Dim
1-10V
DALI

LENS




30° Beam 60° Beam

REFLECTOR




Matt White Black

D150



Light distribution for 3000K

18W 2000 lm-2500 lm

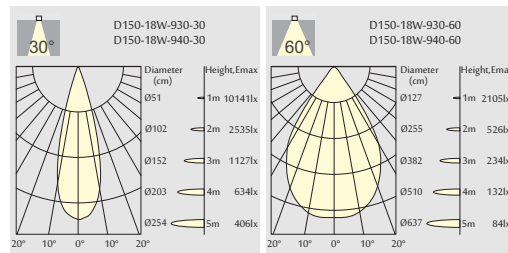


Order Information

D150-18W 2000-2500 Lm MODELS (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
D150-18W-930-30	2800 lm	2300 lm	36 V	500 mA	18 W	21 W	90	3000K	30°
D150-18W-940-30	3000 lm	2500 lm	36 V	500 mA	18 W	21 W	90	4000K	30°
D150-18W-930-60	2800 lm	2000 lm	36 V	500 mA	18 W	21 W	90	3000K	60°
D150-18W-940-60	3000 lm	2200 lm	36 V	500 mA	18 W	21 W	90	4000K	60°

25W 2700 lm-3300 lm

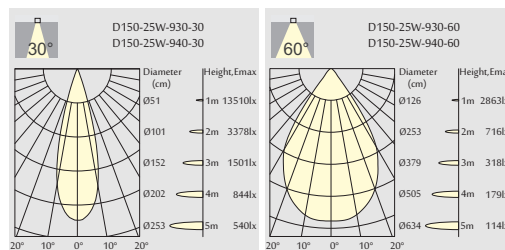

Order Information

D150-25W 2700-3300 Lm MODELS (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
D150-25W-930-30	3800 lm	3100 lm	36 V	700 mA	25 W	28 W	90	3000K	30°
D150-25W-940-30	4000 lm	3300 lm	36 V	700 mA	25 W	28 W	90	4000K	30°
D150-25W-930-60	3800 lm	2700 lm	36 V	700 mA	25 W	28 W	90	3000K	60°
D150-25W-940-60	4000 lm	2900 lm	36 V	700 mA	25 W	28 W	90	4000K	60°

