

MLF10/MLFT10

Downlight



Quick info

GENERAL

Recessed

Fixed

Square

Trimless

LED

SMD LED module

2700K, 3000K, 4000K

CRI>90

Binning < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

Direct Illumination

Beam angle 24°, 40°

PHYSICAL

Aluminium

Wet painting

Secondary reflector plastic


Function

The MLF10 mini LED downlight delivers with two beam angle options (24° and 40°) to enhance visual comfort and ambience. Offering a professional-grade option for a variety of settings including hotels, warehouses, institutions, offices, showrooms, and residential spaces.

Upon opening, it casts a clean, focused light that highlights contents with clarity, creating a sense of brightness, order, and sophistication.


Ideal for wardrobe and cabinet applications, the downlight is available

Features

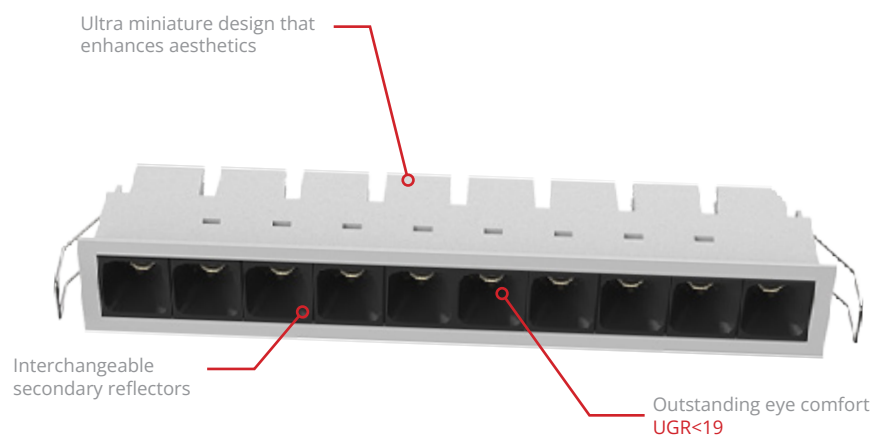


Dimensions

MLF10

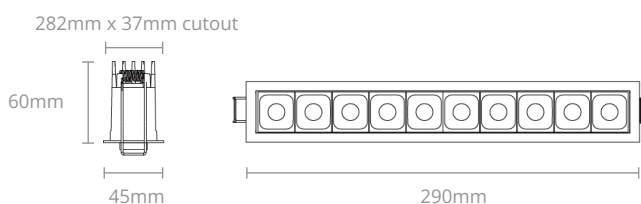

MLFT10

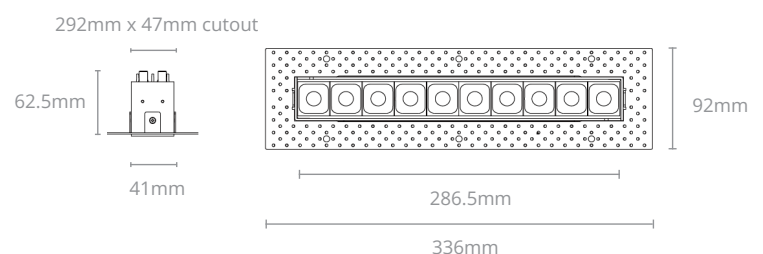

MLF10/MLFT10

Downlight

Ordering info

SYSTEM POWER

24W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI>90

ELECTRICAL

Non-Dim
Phase-Dim
1-10V Dim
DALI

HOUSING

White
Black
Trimless

LENS



24° Beam



40° Beam

SECONDARY REFLECTOR

Black
White
Matt
Gold

Technical Information

Fitting	Module Output	LED Wattage	System Wattage	CRI	Beam
MLF10-22W-930-24	1600lm	22W	24W	90	24°
MLF10-22W-940-24	1700lm	22W	24W	90	24°
MLF10-22W-930-40	1600lm	22W	24W	90	40°
MLF10-22W-940-40	1700lm	22W	24W	90	40°
MLFT10-22W-930-24	1600lm	22W	24W	90	24°
MLFT10-22W-940-24	1700lm	22W	24W	90	24°
MLFT10-22W-930-40	1600lm	22W	24W	90	40°
MLFT10-22W-940-40	1700lm	22W	24W	90	40°

Ordering Information

XXX10 - XXW - XX - XX - XX - MA - ND - XX

Fitting	Wattage	CRI	CCT	Lens	Secondary Reflector	Controls	Finish
(MLF) (MLFT)Trimless	(22) 22W	(90) CRI>90	(27) 2700K (30) 3000K (40) 4000K	(24) 24° (40) 40°	(MA) Matt (WH) White (GO) Gold (BL) Black	() No Driver (ND)Non-Dimmable (1-10) 1-10V Dim (DA) DALI	(10) Black (11) White

PLEASE REPLACE XX WITH THE FIGURE INSIDE THE BRACKETS LOCATED IN THE TABLE.