

iSTART 125 - ROUND

LED Downlight



Quick info

GENERAL

Recessed

Adjustable

Fixed

Trimmed

Trimless

Round

LED

COB LED module

3000K, 4000K

CRI>90

Binning < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

Direct Illumination

Beam angle 20°, 30°, 36°, 40°, 50°

PHYSICAL

Aluminium

Powder coating

Function

START 125 is a versatile series comprising of adjustable and fixed fittings available in trimmed or trimless.

START streamlines the process with a single light engine, with an adjustable head that offers flexible positioning, with 355° rotation and 90° pivot

capabilities.


A smart mechanical design ensures precise alignment.

Features

30° tilt and 355° rotation


Adjustable
Features precise
angle alignment

Easy to adjust
Precision engineered
adjustment mechanism
achieves accurate angle
alignment

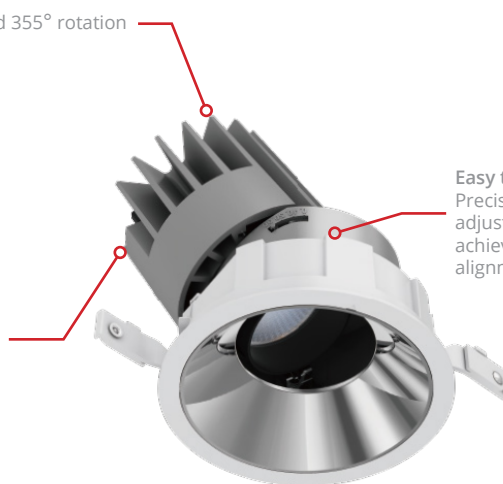


Dimensions

SRA125/SRF125



TRA125/TRF125



iSTART 125 - ROUND

LED Downlight

Ordering info

SYSTEM POWER

21W
28W

COLOUR TEMPERATURE

3000K
4000K

COLOUR RENDERING INDEX

CRI>90

ELECTRICAL

Non-Dim
Phase-Dim
1-10V Dim
DALI

HOUSING

White
Black
Trimless

LENS



20° Beam



28° Beam



35° Beam



45° Beam



50° Beam

Technical Information

Fitting	Module Output	LED Wattage	System Wattage	CRI	Beam
SRF125-18W-930	1500lm	18W	21W	90	28°/35°
SRF125-18W-940	1600lm	18W	21W	90	28°/35°
SRF125-18W-930	1300lm	18W	21W	90	45°
SRF125-18W-940	1400lm	18W	21W	90	45°
SRF125-25W-930	2100lm	25W	28W	90	28°/35°
SRF125-25W-940	2200lm	25W	28W	90	28°/35°
SRF125-25W-930	1800lm	25W	28W	90	45°
SRF125-25W-940	1900lm	25W	28W	90	45°
TRF125-18W-930	1500lm	18W	21W	90	28°/35°
TRF125-18W-940	1600lm	18W	21W	90	28°/35°
TRF125-18W-930	1300lm	18W	21W	90	45°
TRF125-18W-940	1400lm	18W	21W	90	45°
TRF125-25W-930	2100lm	25W	21W	90	28°/35°
TRF125-25W-940	2200lm	25W	21W	90	28°/35°
TRF125-25W-930	1800lm	25W	21W	90	45°
TRF125-25W-940	1900lm	25W	21W	90	45°
SRA125-18W-930	1600lm	18W	21W	90	20°/35°
SRA125-18W-940	1700lm	18W	21W	90	20°/35°
SRA125-18W-930	1400lm	18W	21W	90	50°
SRA125-18W-940	1500lm	18W	21W	90	50°
SRA125-25W-930	2200lm	25W	28W	90	20°/35°
SRA125-25W-940	2300lm	25W	28W	90	20°/35°
SRA125-25W-930	1900lm	25W	28W	90	50°
SRA125-25W-940	2000lm	25W	28W	90	50°
TRA125-18W-930	1600lm	18W	21W	90	28°/35°
TRA125-18W-940	1700lm	18W	21W	90	28°/35°
TRA125-18W-930	1400lm	18W	21W	90	45°
TRA125-18W-940	1500lm	18W	21W	90	45°
TRA125-25W-930	2200lm	25W	21W	90	28°/35°
TRA125-25W-940	2300lm	25W	21W	90	28°/35°
TRA125-25W-930	1900lm	25W	21W	90	45°
TRA125-25W-940	2000lm	25W	21W	90	45°

Ordering Information

XXX125 - XXW - XX - XX - XX - ND - XX

Fitting

Wattage

CRI

CCT

Lens

Controls

Finish

(SRF) Round Fixed Downlight
(SRA) Round Adjustable Downlight
(TRF) Trimless Round Fixed Downlight
(TRA) Trimless Round Adjustable Downlight

(18) 18W
(25) 25W

(30) 3000K
(40) 4000K

(90) CRI>90

(20) 20°
(28) 28°
(35) 35°
(45) 45°
(50) 50°

(ND) Non-Dim
(PH) Phase-Dim
(1-10) 1-10V Dim
(DA) DALI

(10) Black
(11) White

PLEASE REPLACE XX WITH THE FIGURE INSIDE THE BRACKETS LOCATED IN THE TABLE.