

TRACKLIGHT / FELLOW M

LED SPOTLIGHT SYSTEM



Quick info

GENERAL

track light
with integral non-dim LED driver

LED

COB LED module
2700K, 3000K, 4000K
CRI>90
Binning < 3-Step MacAdam

OPTICAL

direct illumination
beam angle 18°, 30°, 45°

ELECTRICAL

non DIM

PHYSICAL

aluminium
powder coating

Function

FELLOW M perfectly combines functionality and aesthetics. Elegant design with integral non-dim LED driver. The head rotates through 355° and pivots through 90°.

Optimized passive cooling system ensures low temperature and long lifetime of LED. Front ring provides good glare control.



Order options

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 90

HOUSING



White

Black

LENS



18° Beam

30° Beam

45° Beam

ANTI-GLARE ACCESSORY




Honeycomb mesh
HM-M

TRACK ADAPTER




3-Circuits

FELLOW M



Light distribution for 3000K

28 W 2700lm-2900lm

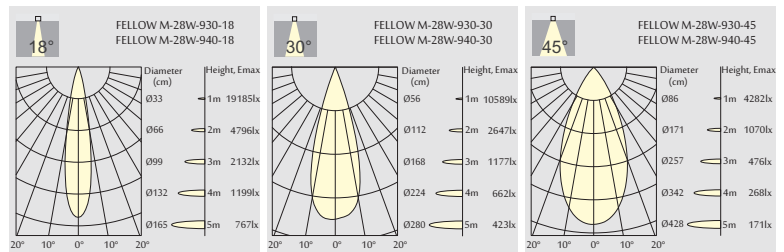

Order Information

FELLOW M-28W 2700 Lm MODELS

(CITIZEN LED)

Code	LED output	Module output	CD	LED Power	System Power	CRI	CCT	BEAM
FELLOW M-28W-930-18	3400 lm	2700 lm	19194 cd	25 W	28 W	90	3000K	18°
FELLOW M-28W-940-18	3600 lm	2900 lm	20012 cd	25 W	28 W	90	4000K	18°
FELLOW M-28W-930-30	3400 lm	2700 lm	10662 cd	25 W	28 W	90	3000K	30°
FELLOW M-28W-940-30	3600 lm	2900 lm	11854 cd	25 W	28 W	90	4000K	30°
FELLOW M-28W-930-45	3400 lm	2700 lm	4285 cd	25 W	28 W	90	3000K	45°
FELLOW M-28W-940-45	3600 lm	2900 lm	4588 cd	25 W	28 W	90	4000K	45°