



Key Features

| | | | |
|-----------------|----------------|---------------------------------|---------------------|
| Optical Systems | 90° Beam Angle | CCT | 4000K |
| Mounting Type | Recessed | Colour Consistency (LED Module) | 3 SDCM |
| Finish Options | White Black | COI Compliant | N/A |
| Warranty | 5 Years | Lumen Output | 1140 - 3325lm |
| CRI | >80 | Lifetime | L70 (B50) 50,000hrs |

Application

Suitable for use in Residential, Commercial and Retail applications IP rating allows use in wet spaces.

Design

Suitable for use with covered insulation. Available in 5 power outputs and associated physical form factors. Multiple dimming system compatibility.

Installation

Recessed in suitable cutout using springclips supplied.

Notes


- Data value may change depending on configurations and product availability.

Configurations

| Product Series | Non Dim System wattage | COB Output (lm) | Cutout | Dimensions (DxH) |
|----------------|------------------------|-----------------|---------------|------------------|
| SMD3-12W-E | 12 | 1140 | Ø100 - 1 05mm | Ø115 x 48mm |
| SMD4-15W-E | 15 | 1425 | Ø130 - 1 35mm | Ø145 x 60mm |
| SMD5-20W-E | 20 | 1900 | Ø145 - 150mm | Ø159 x 60mm |
| SMD6-25W-E | 25 | 2375 | Ø165 - 180mm | Ø190 x 60mm |
| SMD8-35W-E | 35 | 3325 | Ø200 - 220mm | Ø230 x 72mm |


Specifications subject to change without notice.

Photometrics

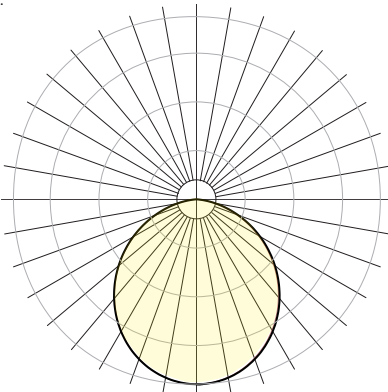

Nominal polar curve
SMD8-35W-E, 4000K

Dimensions

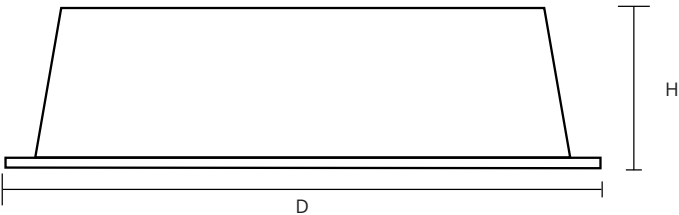

Code

SMD4-15W-E / 11 / DALI

| Product Series | Finish | | Driver | |
|--|----------|----------------|--------------------|--|
| SMD3-12W-E SMD4-15W-E SMD5-20W-E SMD6-25W-E SMD8-35W-E | 10 11 | Black White | PD DALI 1-10 | Phase Dimming DALI Dimming 1-10V Dimming |