

WG-LED

LED WIRE GUARD BATTEN




Key Features

- L80 B10.
- Rated 70,000 hours.
- CRI>80.
- WG-LED fabricated from 0.7mm zincseal steel with galvanized wire guard and white powder coated finish.
- WGAL-LED 1.0mm aluminum body for marine/corrosive environment with galvanized wire guard and white powder coat finish.
- Zincseal steel white end caps screw fixed to the body.
- Suitable for fixing directly to ceiling or may be suspended with chains or rods.
- Wide body (pictured) or narrow body available.

Accessories

- Suspension kits chain or rod
- Also available as a lift well guarded batten, complete with end mounting brackets and flex & plug from end of the fitting.

Dimensions

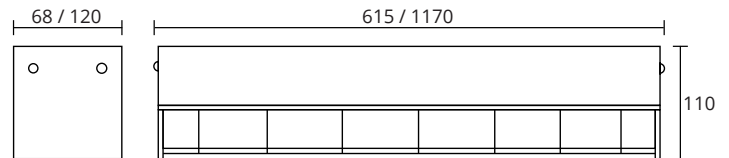

Technical Information

Configuration	Non Dim System Wattage	Combined board output (lm)	Dimensions
1x08W	10.6	1220	615/N
2x08W	22.20	2440	615/W & 1170/N
4x08W	38.10	4880	1170/W
1x14W	17.62	2200	615/N
2x14W	34.34	4400	615/W & 1170/N
4x14W	68.52	8800	1170/W

Code

WG-LED/2X08/12/N/40/ND

Product Series		# Boards		Wattage (W)		Nominal Dimensions		Fitting Width		CCT		Lift Well Option		Driver	
WG-LED	Steel Body	1	1 Board	8	8 Watts	6	600 mm	N	Narrow Body	30	3000K	(Blank)	Standard	ND	Non Dim
WGAL-LED	Aluminium Body	2	2 Board	14	14 Watts	12	1000 mm	W	Wide Body	40	4000K	LW	Lift Well	DALI	DALI Dim
		4	4 Board											SD	Switch Dim

See Technical Information Table for configurations options.
Specifications subject to change without notice.

