

DOME / D100

LED DOWNLIGHT



Order options

SYSTEM POWER

11W
15W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 90

ELECTRICAL-Remote driver

Non-Dim
Phase Dim
1-10V
DALI

LENS




30°Beam 50°Beam

REFLECTOR




Matt White Black

D100



Light distribution for 3000K

9W 1000 lm-1200 lm

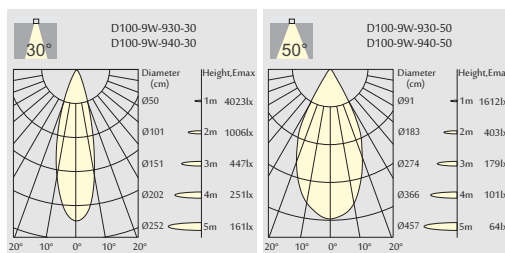


Order Information

D100-9W 1000-1200 Lm MODELS (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
D100-9W-930-30	1300 lm	1100 lm	36 V	260 mA	9 W	11 W	90	3000K	30°
D100-9W-940-30	1400 lm	1200 lm	36 V	260 mA	9 W	11 W	90	4000K	30°
D100-9W-930-50	1300 lm	1000 lm	36 V	260 mA	9 W	11 W	90	3000K	50°
D100-9W-940-50	1400 lm	1100 lm	36 V	260 mA	9 W	11 W	90	4000K	50°

13W 1300 lm-1600 lm

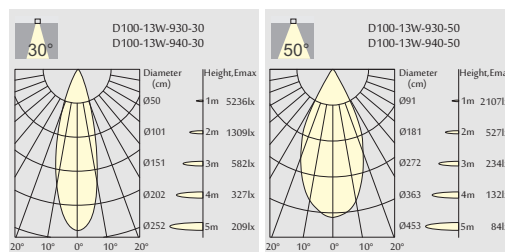

Order Information

D100-13W 1300-1600 Lm MODELS (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
D100-13W-930-30	1800 lm	1500 lm	36 V	350 mA	13 W	15 W	90	3000K	30°
D100-13W-940-30	1900 lm	1600 lm	36 V	350 mA	13 W	15 W	90	4000K	30°
D100-13W-930-50	1800 lm	1300 lm	36 V	350 mA	13 W	15 W	90	3000K	50°
D100-13W-940-50	1900 lm	1400 lm	36 V	350 mA	13 W	15 W	90	4000K	50°

