

Quick info

GENERAL

Track Light

with in-track LED driver

LED

COB LED module

2700K, 3000K, 4000K

CRI>80, CRI>90

Binning < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

Direct Illumination

Beam angle 20°-35°

PHYSICAL

Aluminium

Powder coating

Function

RINGO seamlessly blends functionality The adjustable head offers flexible with refined aesthetics. Its elegant design features an in-track LED driver and an optimised passive cooling system, which work together to maintain low operating temperatures and ensure a long LED lifespan.

positioning, with 355° rotation and 90° pivot capabilities. Additionally, the front ring enhances glare control, while the zoom lens ensures high luminous efficiency and uniform light distribution, delivering exceptional visual comfort.

Features



distribution

Dimensions



RINGO S-E-Z Spotlight

Ordering info

SYSTEM POWER

15W

COLOUR TEMPERATURE

2700K 3000K 4000K

COLOUR RENDERING INDEX

CRI>80 CRI>90

HOUSING

White Black

LENS



20°-35° Beam

ACCESSORIES



Honeycomb Mesh

TRACK ADAPTER








OSRAM 3-Circuit

■ Technical Information

Fitting	Module Output	LED Wattage	System Wattage	CRI	Beam
RINGO S-E-Z-15W-930	1100lm	13W	15W	90	20° - 35°
RINGO S-E-Z-15W-940	1200lm	13W	15W	90	20° - 35°

Ordering Information

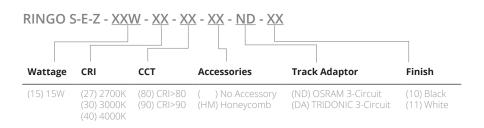

PLEASE REPLACE XX WITH THE FIGURE INSIDE THE BRACKETS LOCATED IN THE TABLE.