


TRACKLIGHT / ALPHA S

LED SPOTLIGHT SYSTEM



Quick info

GENERAL

track light

LED

COB LED module

2700K, 3000K, 4000K

CRI>90

Binning < 3-Step MacAdam

OPTICAL

direct illumination

beam angle 12°, 18°, 25°, 40°

ELECTRICAL

non DIM

Ready2mains

DALI

PHYSICAL

aluminium

powder coating

Function

ALPHA S perfectly combines design and function. The head rotates through 355° and pivots through 90°. The rotating position can be read by the scale marked on LED driver box. Optimized passive cooling system ensures low temperature and long lifetime of LED.

Front ring provides good glare control. A combination of perfectly developed lens and reflector provides highly precise light distribution.



Order options

SYSTEM POWER

15W
28W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 90

ELECTRICAL

non DIM
Ready2mains
DALI

HOUSING



White

Black

REFLECTOR



12°Beam 18°Beam 25°Beam 40°Beam

ANTI-GLARE ACCESSORY




Honeycomb mesh
HM-M

TRACK ADAPTER




3-Circuits

ALPHA S



Light distribution for 3000K

15 W 1000lm-1100lm

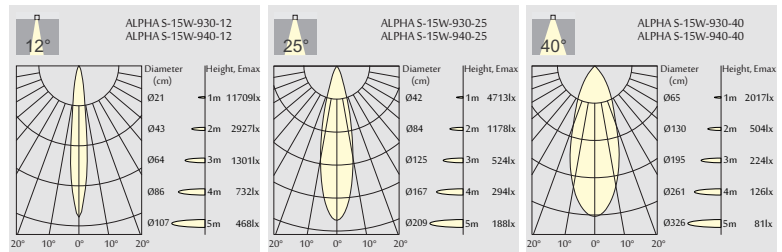


Order Information

ALPHA S-15W 1000 Lm MODELS

(CITIZEN LED)

Code	LED output	Module output	CD	LED Power	System Power	CRI	CCT	BEAM
ALPHA S-15W-930-12	1300 lm	1000 lm	11715 cd	13 W	15 W	90	3000K	12°
ALPHA S-15W-940-12	1400 lm	1100 lm	12392 cd	13 W	15 W	90	4000K	12°
ALPHA S-15W-930-25	1300 lm	1000 lm	4721 cd	13 W	15 W	90	3000K	25°
ALPHA S-15W-940-25	1400 lm	1100 lm	5056 cd	13 W	15 W	90	4000K	25°
ALPHA S-15W-930-40	1300 lm	1000 lm	2018 cd	13 W	15 W	90	3000K	40°
ALPHA S-15W-940-40	1400 lm	1100 lm	2078 cd	13 W	15 W	90	4000K	40°

28 W 1900-2000lm

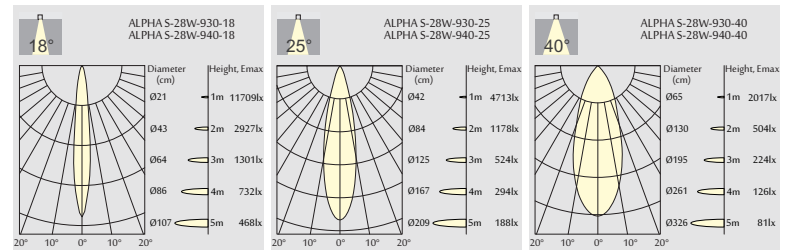

Order Information

ALPHA S-28W 1900 Lm MODELS

(CITIZEN LED)

Code	LED output	Module output	CD	LED Power	System Power	CRI	CCT	BEAM
ALPHA S-28W-930-18	2500 lm	1900 lm	11606 cd	25 W	28 W	90	3000K	18°
ALPHA S-28W-940-18	2600 lm	2000 lm	12158 cd	25 W	28 W	90	4000K	18°
ALPHA S-28W-930-25	2500 lm	1900 lm	6890 cd	25 W	28 W	90	3000K	25°
ALPHA S-28W-940-25	2600 lm	2000 lm	7260 cd	25 W	28 W	90	4000K	25°
ALPHA S-28W-930-40	2500 lm	1900 lm	3305 cd	25 W	28 W	90	3000K	40°
ALPHA S-28W-940-40	2600 lm	2000 lm	3478 cd	25 W	28 W	90	4000K	40°