

ICU / ICU1X55

LED DOWNLIGHT
ADJUSTABLE



Order options

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 90

ELECTRICAL-Remote driver

non DIM
phase DIM
1-10V
DALI

LENS




TRIM



DECORATION RING




ICU1X55

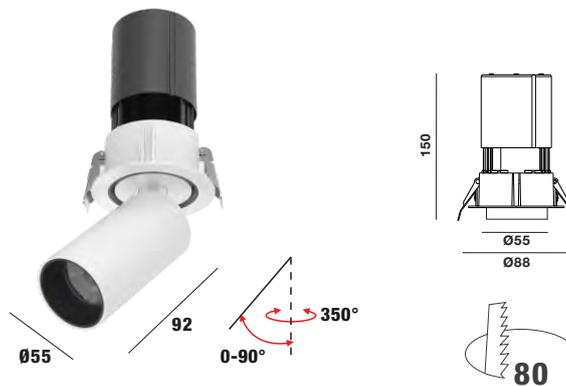

Light distribution for 3000K

9W 720 lm-800 lm

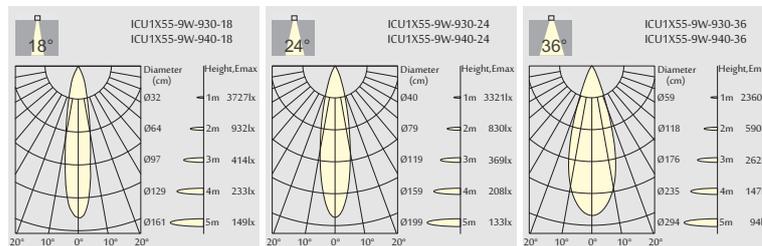

Order Information

ICU1X55-9W 720 Lm MODELS		(CITIZEN LED)							
Code	LED output	Downlight output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ICU1X55-9W-930-18	950 lm	720 lm	36 V	260 mA	9 W	11 W	90	3000K	18°
ICU1X55-9W-940-18	1050 lm	800 lm	36 V	260 mA	9 W	11 W	90	4000K	18°
ICU1X55-9W-930-24	950 lm	720 lm	36 V	260 mA	9 W	11 W	90	3000K	24°
ICU1X55-9W-940-24	1050 lm	800 lm	36 V	260 mA	9 W	11 W	90	4000K	24°
ICU1X55-9W-930-36	950 lm	720 lm	36 V	260 mA	9 W	11 W	90	3000K	36°
ICU1X55-9W-940-36	1050 lm	800 lm	36 V	260 mA	9 W	11 W	90	4000K	36°

For black housing: ICU1X55B
E.g. ICU1X55B-9W-930-18-9W, 3000K, 18° beam, B black housing.

