













Voxel Air (VXA)



Voxel Grid (VXG)

Key Features

Optical Systems	High transmission curved LED opal diffuser
Mounting Type	T-Bar
Finish Options	White
Warranty	5 Years
CRI	>80 >90 optional

ССТ	3000K 4000K (Sandard)					
Colour Consistency						
(LED Module)	3 SDCM					
COI Compliant	N/A					
Lumen Output	1450 - 4260lm					
Lifetime	L90 (B10) 60,000hrs					

Application

Commercial and healthcare illumination compatible with standard 38 mm T-Bar. Voxel is suited to offices, reception areas, meeting rooms boardrooms, retail and all high end administation spaces.

Design

Manufactured in our Brisbane manufacturing facility, we control, test and construct to the highest standards, including materials used. Voxel has a robust construction process utilising 0.75 zincseal alloy, providing IP40 from below & IP20 from above, utilising a high efficiency & long life LED light source.

Installation

Suitable for standard 38mm T-Bar.

Notes

- Data shown is standard, additional sizing is available on request.
- Data value may change depending on configurations and product availability.





Configurations

Product Series	Non Dim	Delivered Lumens	Dimensions (mm)		
			Length	Width	Depth
VXA / VXG	10.5 W	1450	590	290	95
	16.5 W	2300	1190	290	95
	18 W	2460	1190	290	95
	19 W	2615	1190	290	95
	20.5 W	2820	1190	290	95
	27.5 W	3935	1190	290	95
	30 W	4260	1190	290	95


Specifications subject to change without notice.

Spectral Distribution & Photometrics

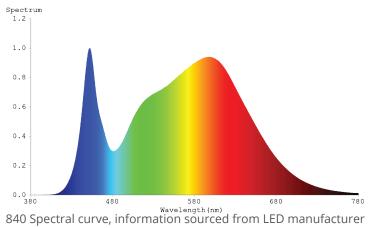



Dimensions



Code

VXA / 17 / 12X3 / 3K / 80 / MS / DA

Product Series Wattage		Dimensions		ССТ		CRI		Accessories		Driver			
VXA VXG	Voxel Air (Return) Voxel Grid	11 17 18 19 21 28 30	10.5 Watts 16.5 Watts 18 Watts 19 Watts 20.5 Watts 27.5 Watts 30 Watts	6x3 12x3 CU	590mm x 290mm 1190mm x 290mm Custom (Specify Slze)	3K 4K 5K	3000K 4000K (Standard) 5000K	80	CRI>80 (Standard) CRI>90	PF MS	Plaster Frame Motion Sensor	ND DA CA EM SD	Non-Dimmable DALI-Dimmable Casambi Maintained Emergency Switch-Dim