

## MLA10 Downlight



### Quick info

#### GENERAL

Recessed  
Adjustable  
Square

#### LED

COB LED module  
2700K, 3000K, 4000K  
CRI>90  
Binning < 3-Step MacAdam

#### ESTIMATED LED LIFETIME

L80 / 50,000h

#### OPTICAL

Direct Illumination  
Beam angle 24°, 40°

#### PHYSICAL

Aluminium  
Wet painting  
Secondary reflector plastic

### Function

The MLA10 mini LED downlight delivers a reliable and intelligent lighting solution. Offering a professional-grade option for a variety of settings including hotels, warehouses, institutions, offices, showrooms, and residential spaces.

Ideal for wardrobe and cabinet applications, the downlight is available

with two beam angle options (24° and 40°) to enhance visual comfort and ambience.


Upon opening, it casts a clean, focused light that highlights contents with clarity, creating a sense of brightness, order, and sophistication.

### Features


Ultra miniature design that enhances aesthetics

Interchangeable secondary reflectors

Outstanding eye comfort  
**UGR<19**

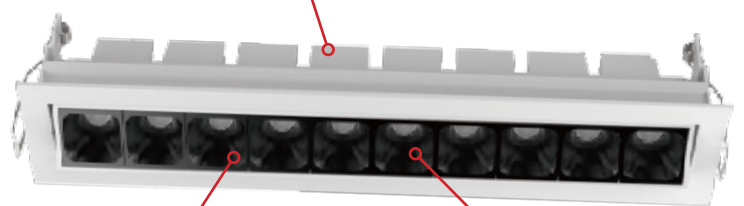

### Dimensions

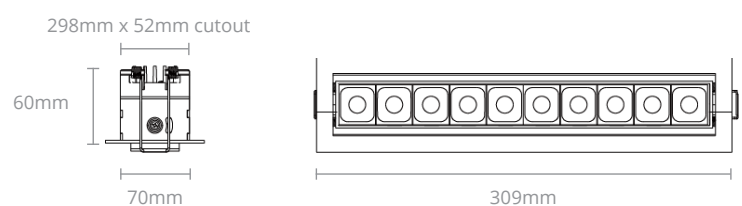

# MLA10 Downlight

## Ordering info

### SYSTEM POWER

24W

### COLOUR TEMPERATURE

2700K  
3000K  
4000K

### COLOUR RENDERING INDEX

CRI>90

### ELECTRICAL

Non-Dim  
Phase-Dim  
1-10V Dim  
DALI

### HOUSING

White  
Black

### LENS



24° Beam



40° Beam

### SECONDARY REFLECTOR

Black  
White  
Matt  
Gold

## Technical Information

| Fitting          | Module Output | LED Wattage | System Wattage | CRI | Beam |
|------------------|---------------|-------------|----------------|-----|------|
| MLA10-22W-930-24 | 1600lm        | 22W         | 24w            | 90  | 24°  |
| MLA10-22W-940-24 | 1700lm        | 22W         | 24w            | 90  | 24°  |
| MLA10-22W-930-40 | 1600lm        | 22W         | 24w            | 90  | 40°  |
| MLA10-22W-940-40 | 1700lm        | 22W         | 24w            | 90  | 40°  |

## Ordering Information

MLA10 - XXW - XX - XX - XX - MA - ND - XX

| Wattage  | CRI         | CCT                                    | Lens                 | Secondary Reflector                                | Controls                                                            | Finish                   |
|----------|-------------|----------------------------------------|----------------------|----------------------------------------------------|---------------------------------------------------------------------|--------------------------|
| (22) 22W | (90) CRI>90 | (27) 2700K<br>(30) 3000K<br>(40) 4000K | (24) 24°<br>(40) 40° | (MA) Matt<br>(WH) White<br>(GO) Gold<br>(BL) Black | ( ) No Driver<br>(ND) Non-Dimmable<br>(1-10) 1-10V Dim<br>(DA) DALI | (10) Black<br>(11) White |

# PLEASE REPLACE XX WITH THE FIGURE INSIDE THE BRACKETS LOCATED IN THE TABLE.