

MLW5 Downlight



Quick info

GENERAL

Recessed

Adjustable

Square

Wallwasher

LED

COB LED module

2700K, 3000K, 4000K

CRI>90

Binning < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

Direct Illumination

PHYSICAL

Aluminium


Wet painting

Function


The MLW5 mini LED downlight delivers clarity, creating a sense of brightness, order, and sophistication. Offering a professional-grade option for a variety of settings including hotels, warehouses, institutions, offices, showrooms, and residential spaces.

Upon opening, it casts a clean, focused light that highlights contents with

Features

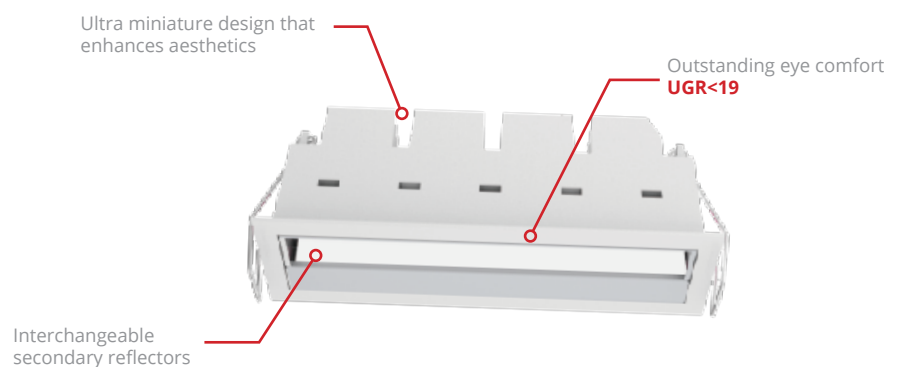

Dimensions

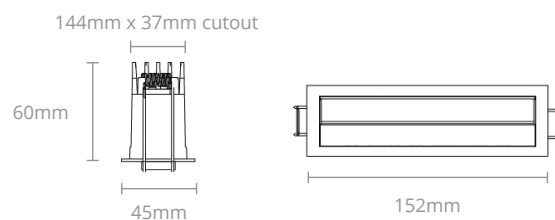

MLW5

Downlight

Ordering info

SYSTEM POWER

13W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI>90

ELECTRICAL

Non-Dim
Phase-Dim
1-10V Dim
DALI

HOUSING

White
Black

Technical Information

Fitting	Module Output	LED Wattage	System Wattage	CRI	Beam
MLW5-11W-930	1000lm	11W	13w	90	/
MLW5-11W-940	1100lm	11W	13w	90	/

Ordering Information

MLW5 - XXW - XX - XX - ND - XX

Wattage	CRI	CCT	Controls	Finish
(11) 11W	(90) CRI>90	(27) 2700K (30) 3000K (40) 4000K	() No Driver (ND) Non-Dimmable (1-10) 1-10V Dim (DA) DALI	(10) Black (11) White

PLEASE REPLACE XX WITH THE FIGURE INSIDE THE BRACKETS LOCATED IN THE TABLE.