

MLA5 Downlight



Quick info

GENERAL

Recessed

Adjustable

Square

LED

SMD LED module

2700K, 3000K, 4000K

CRI>90

Binning < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

Direct Illumination

Beam angle 24°, 40°

PHYSICAL

Aluminium

Wet painting

Secondary reflector plastic

Function

The MLA5 mini LED downlight delivers a reliable and intelligent lighting solution. Offering a professional-grade option for a variety of settings including hotels, warehouses, institutions, offices, showrooms, and residential spaces.

Ideal for wardrobe and cabinet applications, the downlight is available

with two beam angle options (24° and 40°) to enhance visual comfort and ambience.


Upon opening, it casts a clean, focused light that highlights contents with clarity, creating a sense of brightness, order, and sophistication.

Features


Ultra miniature design that enhances aesthetics

Outstanding eye comfort
UGR<19

Interchangeable secondary reflectors

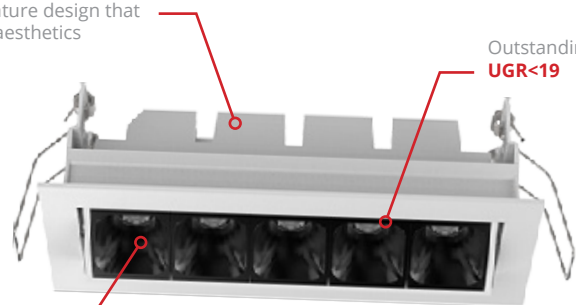

Dimensions

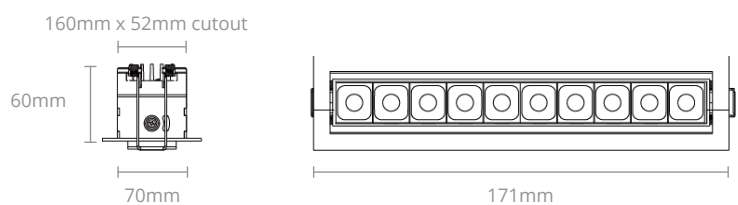

MLA5 Downlight

Ordering info

SYSTEM POWER

11W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI>90

ELECTRICAL

Non-Dim
Phase-Dim
1-10V Dim
DALI

HOUSING

White
Black

LENS



24° Beam



40° Beam

SECONDARY REFLECTOR

Black
White
Matt
Gold

Technical Information

Fitting	Module Output	LED Wattage	System Wattage	CRI	Beam
MLA5-9W-930-24	1600lm	9W	11w	90	24°
MLA5-9W-940-24	1700lm	9W	11w	90	24°
MLA5-9W-930-40	1600lm	9W	11w	90	40°
MLA5-9W-940-40	1700lm	9W	11w	90	40°

Ordering Information

MLA5 - XXW - XX - XX - XX - MA - ND - XX

Wattage	CRI	CCT	Lens	Secondary Reflector	Controls	Finish
(9) 9W	(90) CRI>90	(27) 2700K (30) 3000K (40) 4000K	(24) 24° (40) 40°	(MA) Matt (WH) White (GO) Gold (BL) Black	() No Driver (ND) Non-Dimmable (1-10) 1-10V Dim (DA) DALI	(10) Black (11) White

PLEASE REPLACE XX WITH THE FIGURE INSIDE THE BRACKETS LOCATED IN THE TABLE.