

MLF6-LS2 Downlight



Quick info

GENERAL

Recessed

Adjustable

Square

LED

COB LED module

3000K, 4000K

CRI>90

Binning < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

Direct Illumination

PHYSICAL

Aluminium

Wet painting

Function

The MLF6-LS2 mini LED downlight delivers a reliable and intelligent lighting solution. Offering a professional-grade option for a variety of settings including hotels, warehouses, institutions, offices, showrooms, and residential spaces.

Upon opening, it casts a clean, focused light that highlights contents with


clarity, creating a sense of brightness, order, and sophistication.

Features


Ultra miniature design that enhances aesthetics

Outstanding eye comfort
UGR<19

Interchangeable secondary reflectors

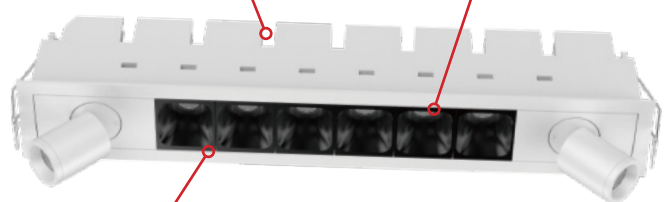

Dimensions

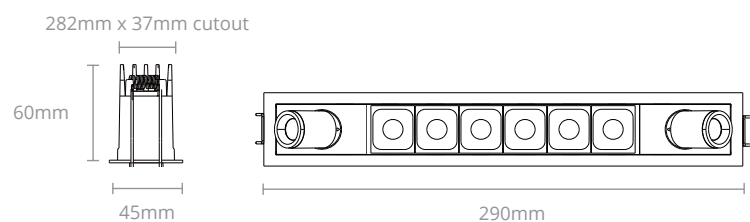

MLF6-LS2

Downlight

Ordering info

SYSTEM POWER
19W

COLOUR TEMPERATURE
3000K
4000K

COLOUR RENDERING INDEX
CRI>90

ELECTRICAL
Non-Dim
Phase-Dim
1-10V Dim
DALI

HOUSING
White
Black

Technical Information

Fitting	Module Output	LED Wattage	System Wattage	CRI	Beam
MLF6-LS2-16W-930-24	1200lm	16W	19W	90	24° + 15°
MLF6-LS2-16W-940-24	1300lm	16W	19W	90	24° + 15°
MLF6-LS2-16W-930-40	1200lm	16W	19W	90	40° + 25°
MLF6-LS2-16W-940-40	1300lm	16W	19W	90	40° + 25°

Ordering Information

MLF6-LS2 - XXW - XX - XX - ND - XX

Wattage	CRI	CCT	Controls	Finish
(16) 16W	(90) CRI>90	(30) 3000K (40) 4000K	() No Driver (ND) Non-Dimmable (1-10) 1-10V Dim (DA) DALI (PD) Phase-Dim	(10) Black (11) White

PLEASE REPLACE XX WITH THE FIGURE INSIDE THE BRACKETS LOCATED IN THE TABLE.