


PELF

LED PANEL LOW UGR

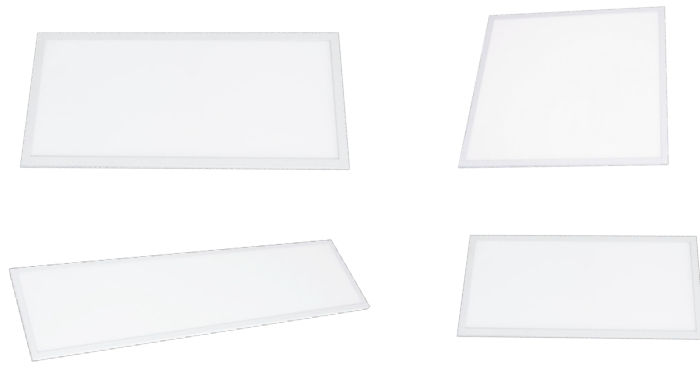

FEATURES

- Slim profile LED Panel.
- Available in 17W, 32W or 50W.
- 50,000 hours at L70.
- CRI > 80.
- Available in 4 different sizes.
- Mounting types include wire suspension, surface mount, plaster and T-bar.
- Micro-prism (UGR19).
- Aluminium frame with powder coated finish.
- Comes with 1.2m flex and plug.
- IP40.
- Non-dimmable and DALI dimming options available.

TECHNICAL INFORMATION

Contact Frend for other lighting configurations.

Wattage	Lumen Output	Diffuser	Colour Temperature	Nominal Dimensions
17W	1600 (lm)	UGR19	4000K/5000K/6500K	600x300
32W	3400(lm)	UGR19	4000K/5000K/6500K	600x600, 1200x300
50W	5000 (lm)	UGR19	4000K/5000K/6500K	1200x600

SPECIFICATIONS

	Dimensions (mm)			
	6X3	6X6	12X3	12x6
Length	595	595	1195	1195
Width	295	595	295	595
Depth	13	13	13	15

Sizing is for T-Bar version only.
Contact Frend Lighting for other mounting sizes.

PRODUCT CODE

Example code: PELF-TB/32/12X3/40/ND

See Technical Information Table for configurations options
Specifications subject to change without notice

Product Series	Wattage	Nominal Dimensions	LED Type	Driver
PELF-TB	T-Bar	17 17W 6X3 600x300	40 4000K	ND Non Dim
PELF-PB	Plaster	32 32W 6X6 600x600	50 5000K	DALI DALI Dim
PELF-SM	Surface Mount	50 50W 12X3 1200X300	65 6500K	
PELF-SUS	Suspension	12X6 1200x600		

FREND
lighting

phone 1300 241 087

fax (617) 3272 9000

email sales@foslighting.com.au

PO Box 268

14 Jaybel Street, Salisbury

Brisbane QLD 4107

www.frend.com.au