

SPF-LED

LED VANDAL PROOF SURFACE MOUNT



FEATURES

- L80 B10.
- Rated 70,000 hours.
- CRI>80.
- Self cooling, zhaga certified LED boards.
- Vandal proof security luminaire.
- Internal body fabricated from 1.2mm steel finished in white powder coat.
- High impact UV stabilized polycarbonate diffuser fixed with tamper-proof screws.
- Impact tested by QUT (Test No 5158).
- IP54 weatherproof version available (WSPF-LED).
- 200mm LED night light available.
- Available in DALI Dim or Switch Dim.



CRI typically greater than




TECHNICAL INFORMATION

Contact Frend for other lighting configurations
Refer to IES files for System Lumens

Configurations	Non Dim System Wattage	Combined Board Output (lm)	Nominal Dimensions (mm)
2x08W	22.20	2440	600x300
4x08W	38.10	4880	1200x300
2x14W	34.34	4400	600x300
4x14W	68.52	8800	1200x300

SPECIFICATIONS

Dimensions (mm)	
	Actual / Nominal
Length	690 / 600
Width	240 / 300
Depth	80

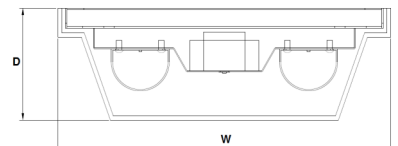

PRODUCT CODE

Example code: SPF-LED/2x08/06/40/ND

See Technical Information Table for configurations options
Specifications subject to change without notice

Product Series	Number of Boards	Wattage of Boards	Nominal Dimensions	LED Type	Driver	LED Night Light
SPF-LED	2	08	06 600x300	30 3000K	ND Non Dim	LED-NL 200mm LED Night Light
WSPF-LED (IP54)	4	14	12 1200x300	40 4000K	DALI DALI Dim	
					SD Switch	