


TDL-LED

ARCHITECTURAL T-BAR

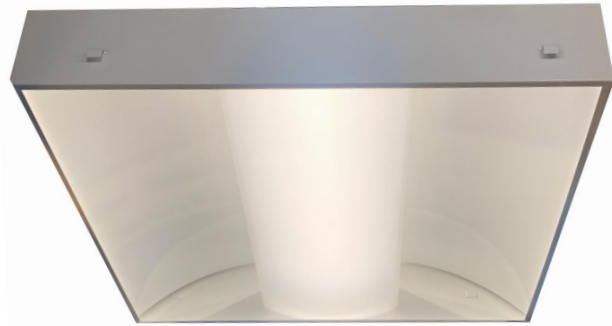

FEATURES

- L80 B10.
- Rated 70,000 hours.
- CRI>80.
- SELV.
- Self cooling, Zhaga certified LED Boards.
- 10 Year Warranty (standard TCI).
- High Transmittance K5 patterned diffuser, pearl in appearance.
- Powder coated white metal body - other colours available on request.
- Available in Plaster Recessed, Surface Mount, Suspended, T-Bar recessed (38mm Standard T-Bar).
- Available in DALI Dim or Switch Dim.



10 Year Warranty



CRI typically greater than 80



TECHNICAL INFORMATION

Contact Frend for other lighting configurations
Refer to IES files for System Lumens

Configurations	Non Dim System Wattage	Combined Board Output (lm)	Nominal Dimensions (mm)
2x08W	22.2	2440	600x300, 600x600 & 1200x300
4x08W	38.1	4880	1200x300
2x14W	34.34	4400	600x300, 600x600 & 1200x300
4x14W	68.52	8800	1200x300

SPECIFICATIONS

Dimensions (mm)	
	Actual / Nominal
Length	297 / 300 597 / 600 1190 / 1200
Width	295 / 300 590 / 600
Depth	67

PRODUCT CODE

Example code: TDL-LED-PB/2X14/12X3/K5/40/ND

See Technical Information Table for configurations options.
Specifications subject to change without notice

Product Series	Number of Boards	Wattage of Boards	Nominal Dimensions	Diffuser Type	LED Type	Driver
TDL-LED-TB T-Bar	2	08	6X3 600x300	K5 K5 Reeded Frost	30 3000K	ND Non Dim
TDL-LED-PB Plaster	4	14	6X6 600x600		40 4000K	DALI DALI Dim
TDL-LED-SM Surface Mount			12X3 1200x300			SD Switch
TDL-LED-SUS Suspended						