

DET

SURFACE MOUNTED LUMINAIRE



FEATURES

- L80 B10.
- 10 year warranty.
- Rated 70,000 hours.
- CRI>80.
- Self cooling, zhaga certified LED boards.
- Future proof replaceable gear tray.
- IK08 Impact Resistant.
- Powder coated white metal body and gear cover protecting the internal components.
- Polycarbonate opal diffuser and end caps.
- Suitable for fixing directly to ceiling or may be rod or wire suspended.
- Optional DALI dim or switch dim.



10 Year Warranty



CRI typically greater than 80




TECHNICAL INFORMATION

Contact Frend for other lighting configurations
Refer to IES files for System Lumens

Configurations	Non Dim System Wattage	Combined Board Output (lm)	Nominal Length
2x08W	22.20	2440	600
4x08W	38.10	4880	1200
2x14W	34.34	4400	600
4x14W	68.52	8800	1200

SPECIFICATIONS

Dimensions (mm)	
	Actual / Nominal
Length	633 / 600
Width	207
Depth	72

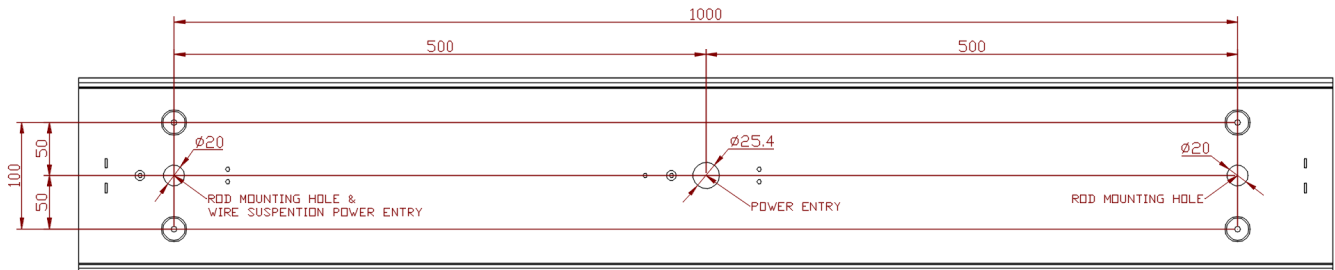

PRODUCT CODE

Example code: DET/4X08/12/40/ND

See Technical Information Table for configurations options.
Specifications subject to change without notice.

Product Series	Number of Boards	Wattage of Boards	Nominal Dimensions	Colour Temperature	Driver
DET	2	8	06 600	30 3000K	ND Non Dim
DET44-SM IP44 Surface Mount	4	14	12 1200	40 4000K	DALI DALI Dim
					SD Switch