

# STL MKII

## STARLITE LED EMERGENCY

### FEATURES

- Fully approved to AS2293 standards.
- Emergency classification: C0: D40, C90: D40
- Sustained emergency system.
- Optional surface mounting box.
- Lithium battery.
- 1.2m flex and plug.
- 140mm and 88mm adapter plates included.




#### Options

Surface mount box

#### Dimensions

230 x 230 x 95mm

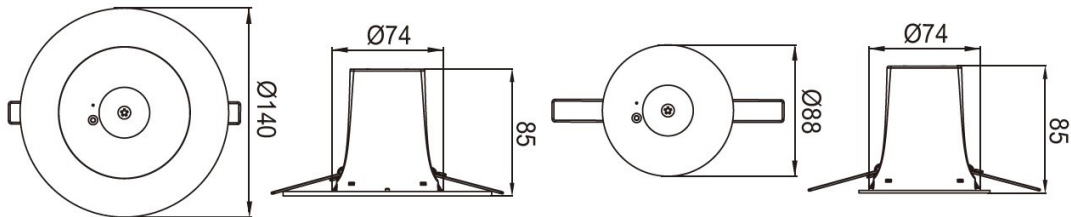

### PRODUCT CODE

Example code: STL-II/R/LED

Specifications subject to change without notice.

Product  
Series

LED  
Type

STL-II/R

Recessed

LED

2W LED

STL-II/S

Surface Mount

**FREND**  
lighting

phone 1300 241 087

fax (617) 3272 9000

email sales@foslighting.com.au

PO Box 268

14 Jaybel Street, Salisbury

Brisbane QLD 4107

[www.frend.com.au](http://www.frend.com.au)